
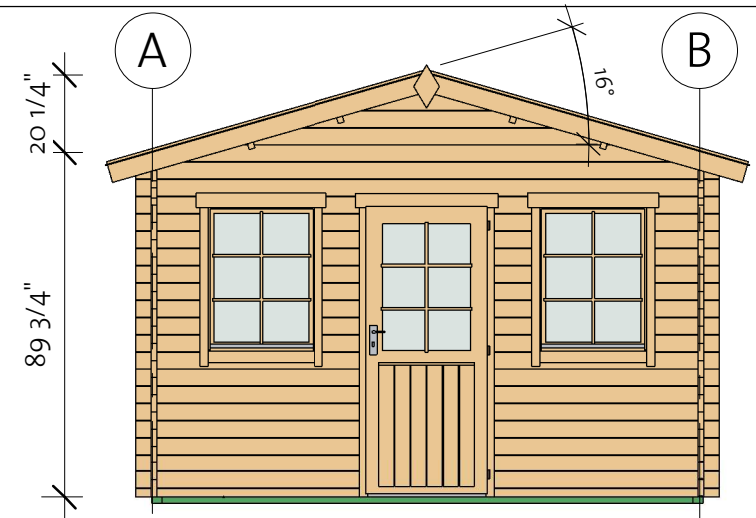


Scarborough 40 (144"x104")

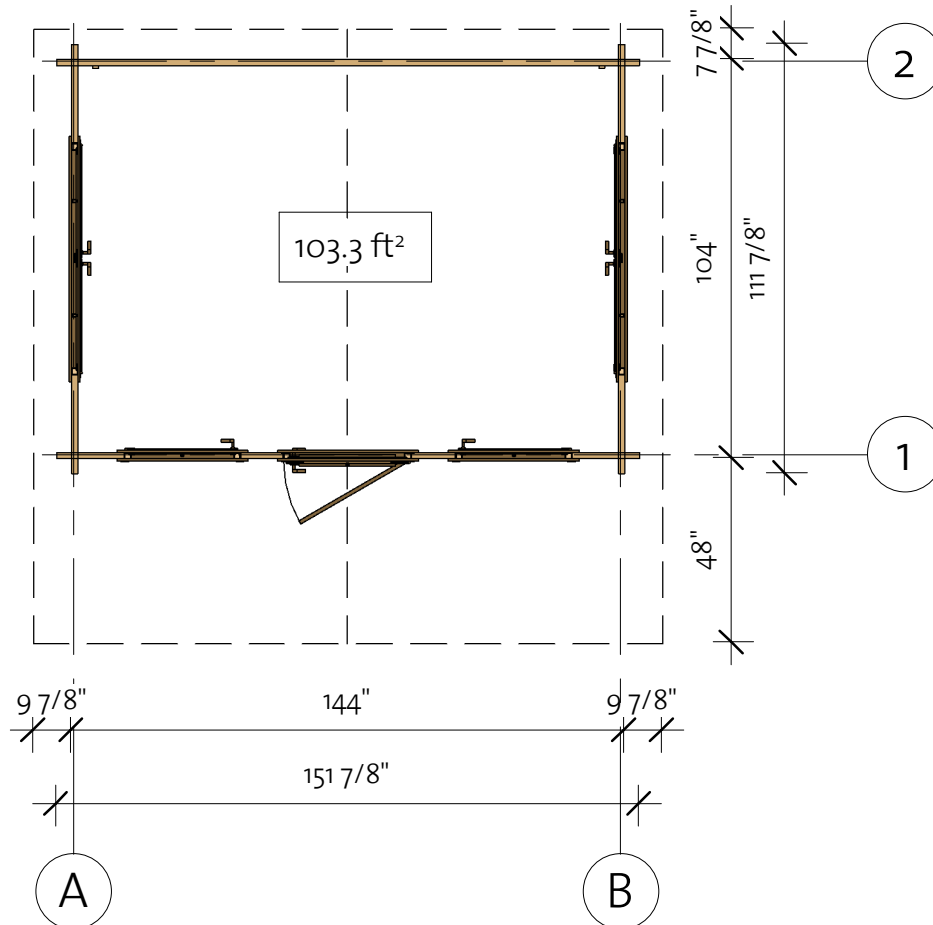


Scarborough 40 (144"x104")

Foundation

Impregnated foundation beams				
Mark	Type	Profile	Count	Length


IFB1	IFB 70x40		6	138 1/8"
IFB2	IFB 70x40		2	103 5/8"

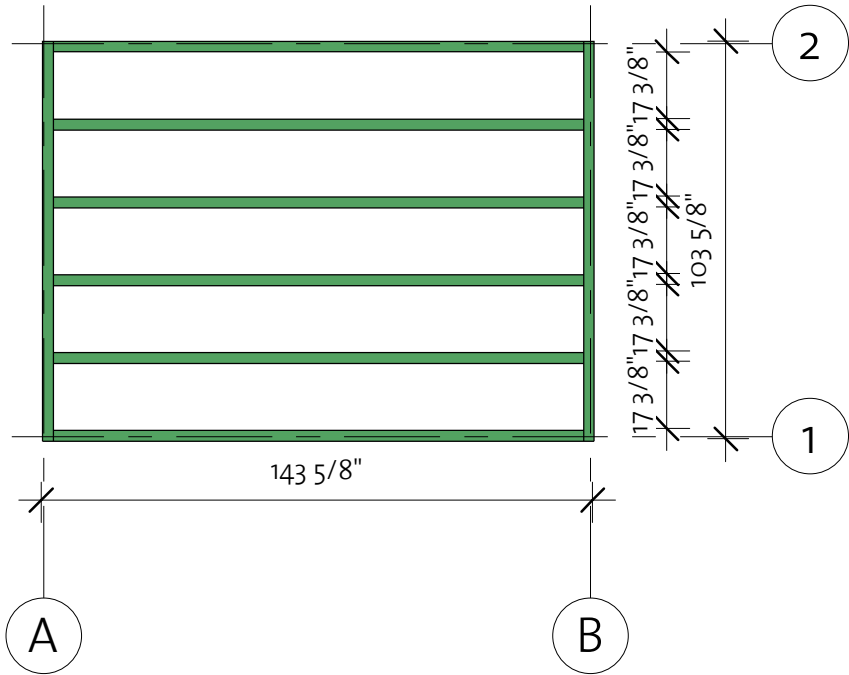

Scarborough 40 (144"x104")


Floor Plan

1 Baseboard

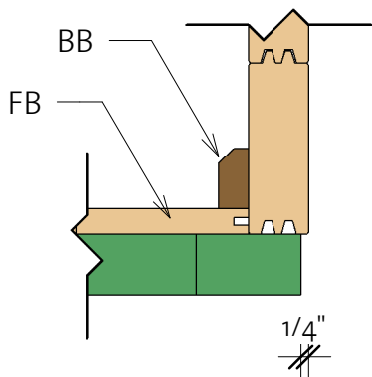



Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		33	100 5/8"
BB1	BB 20x40		2	141 3/4"
BB2	BB 20x40		2	102 3/8"

91805031_201127

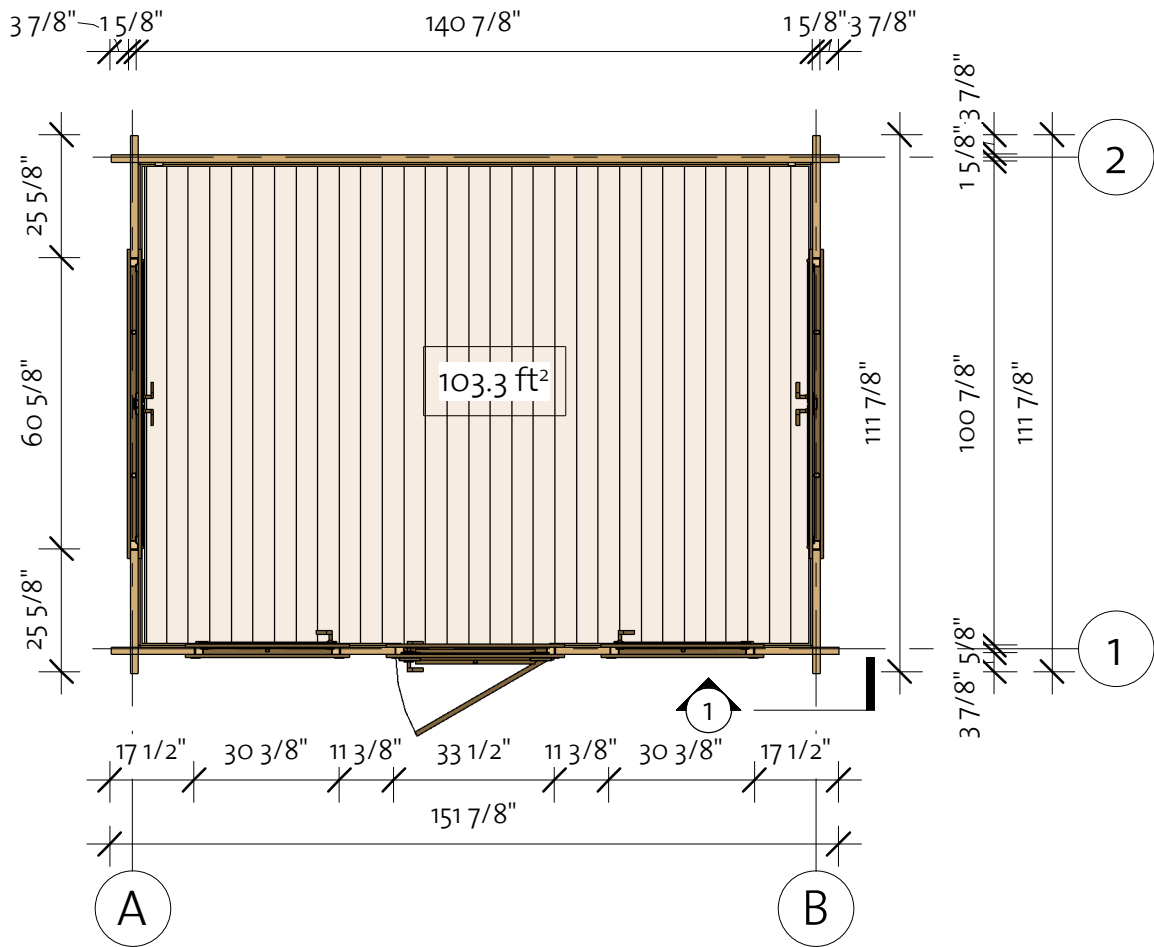

Scarborough 40 (144"x104")

Wall 1

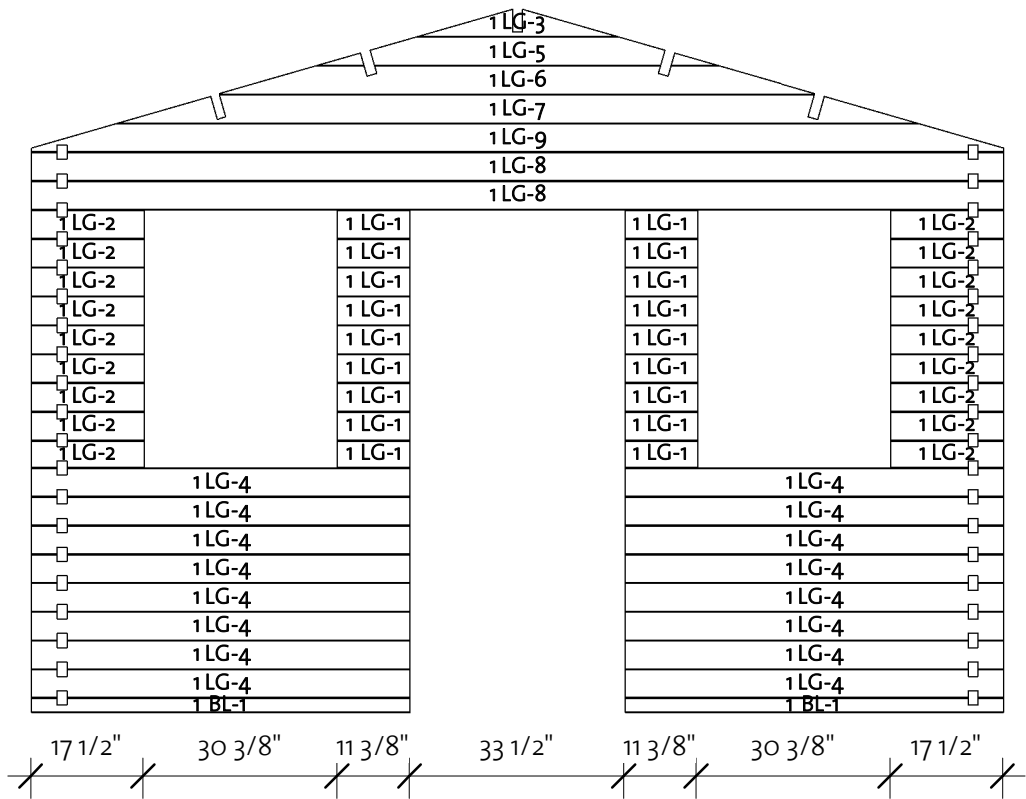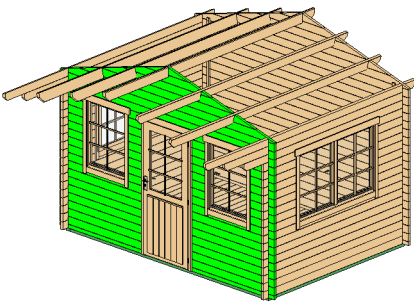

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	59 1/4"
1LG-1	40X114	18	11 3/8"
1LG-2	40X114	18	17 1/2"
1LG-3 *	40X114	1	31 3/8"
1LG-4	40X114	16	59 1/4"
1LG-5 *	40X114	1	62 5/8"
1LG-6 *	40X114	1	93"
1LG-7 *	40X114	1	125 1/4"
1LG-8	40X114	2	151 7/8"
1LG-9 *	40X114	1	151 7/8"



* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40X57	
40X114	

Scarborough 40 (144"x104")

Wall 2

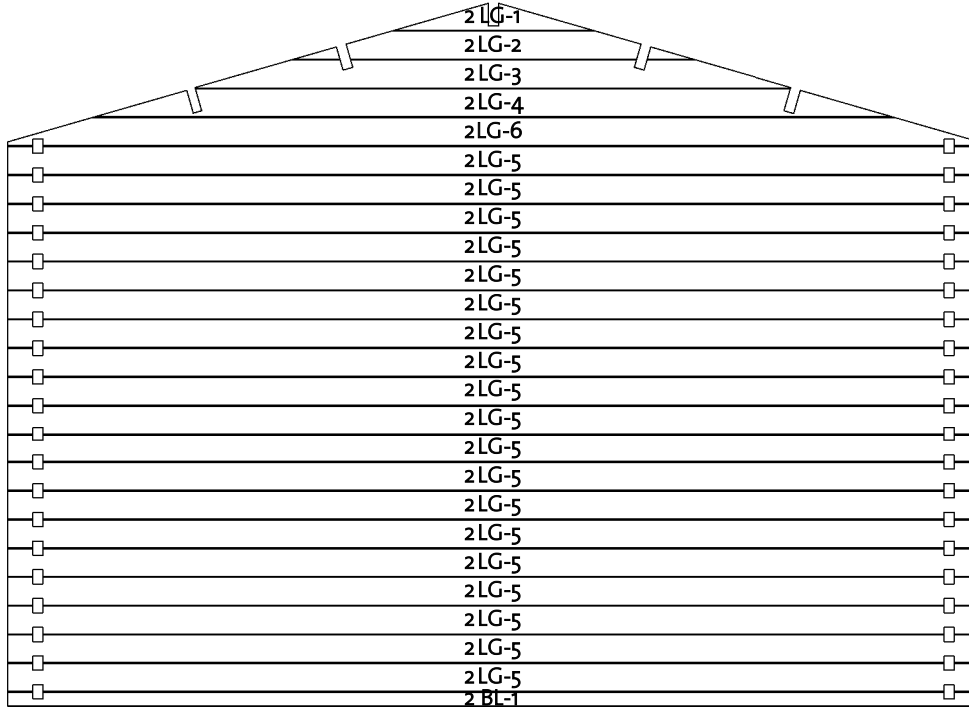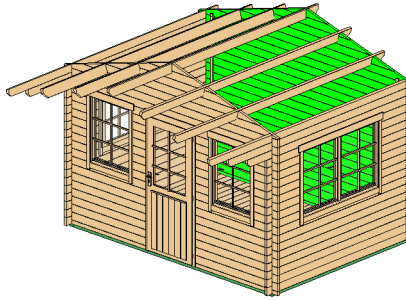

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	151 7/8"
2LG-1 *	40X114	1	31 3/8"
2LG-2 *	40X114	1	62 5/8"
2LG-3 *	40X114	1	93"
2LG-4 *	40X114	1	125 1/4"
2LG-5	40X114	19	151 7/8"
2LG-6 *	40X114	1	151 7/8"


* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	


Scarborough 40 (144"x104")

Wall A

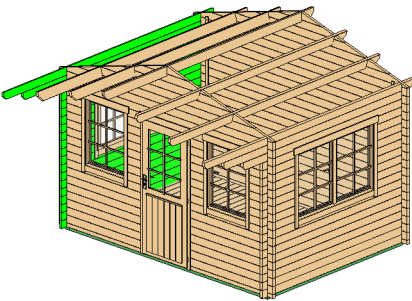

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	18	25 5/8"
ALG-2	40X114	1	141 1/4"
ALG-3	40X114	8	111 7/8"
ALG-4	40X114	1	126 5/8"
ATL-1	40X114	1	159 7/8"

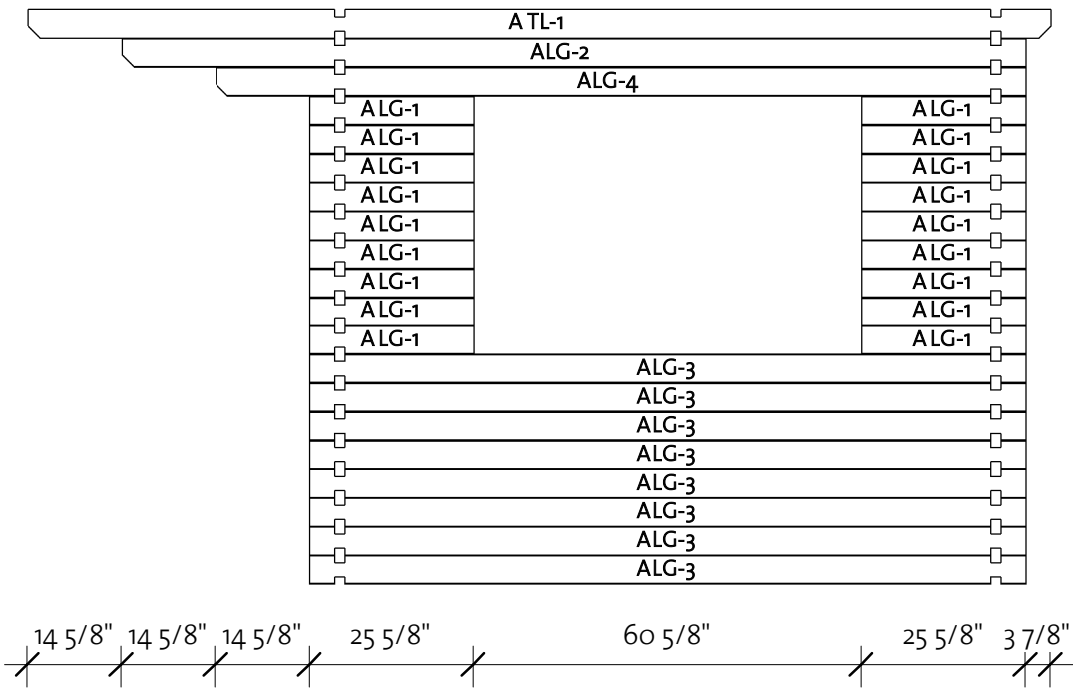


Log Profile Wall A	
Profile	Profile

40X114	
40X114	


Scarborough 40 (144"x104")

Wall B

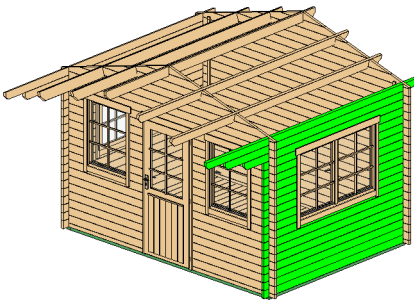

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	18	25 5/8"
BLG-2	40X114	1	141 1/4"
BLG-3	40X114	8	111 7/8"
BLG-4	40X114	1	126 5/8"
BTL-1	40X114	1	159 7/8"

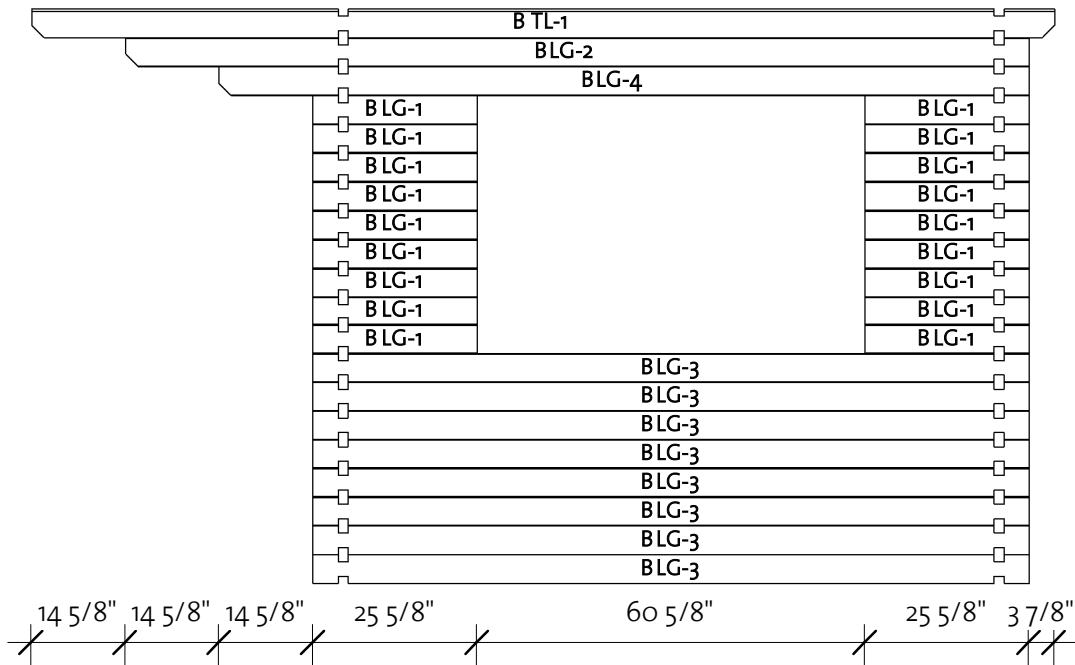


Log Profile Wall B	
Profile	Profile

40X114	
40X114	

Scarborough 40 (144"x104")


Roof 1

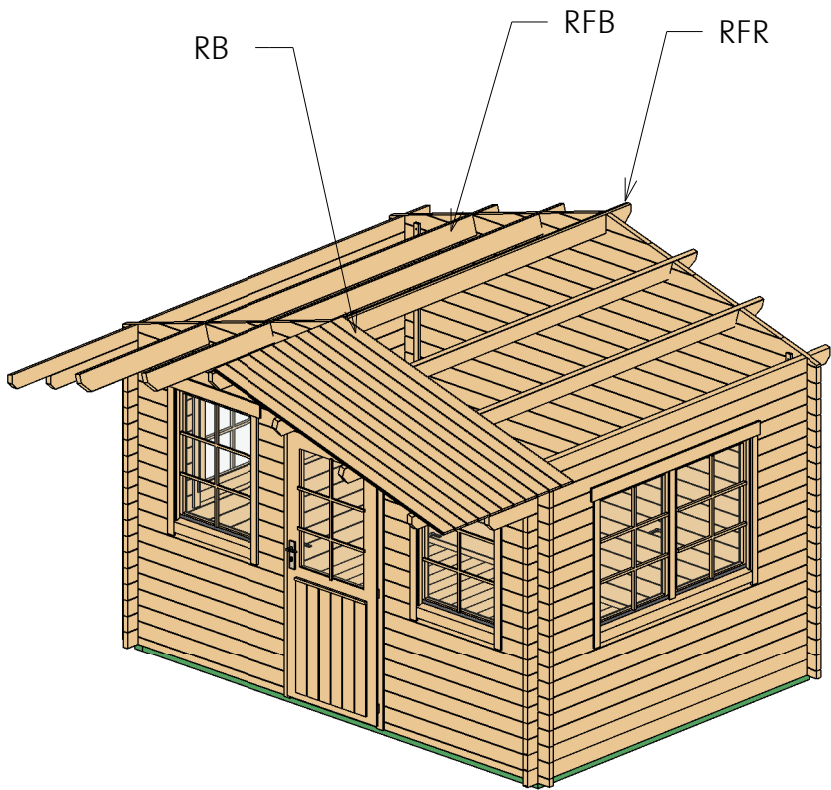


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	159 7/8"
RFB	Beam 40x143		4	159 7/8"
RB	17x114		74	85"

Scarborough 40 (144"x104")



Roof 2

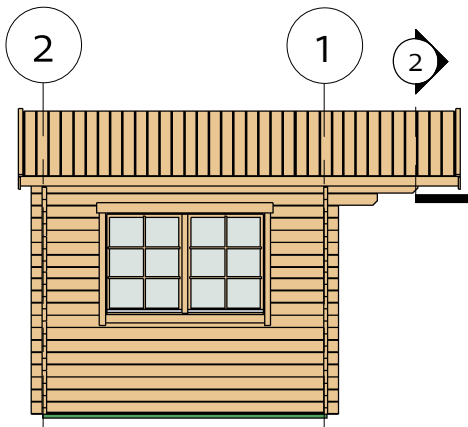

2) Facia

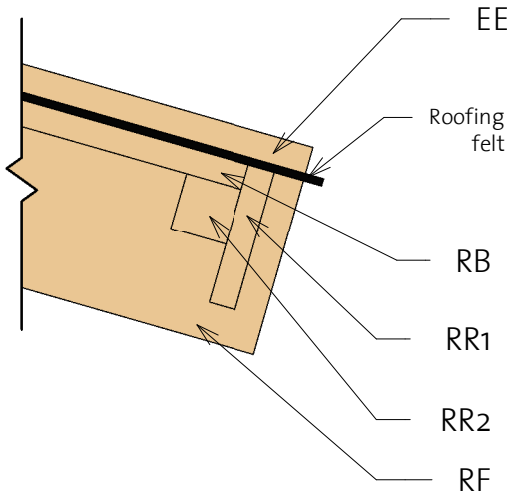

3) Roof Reinforcement

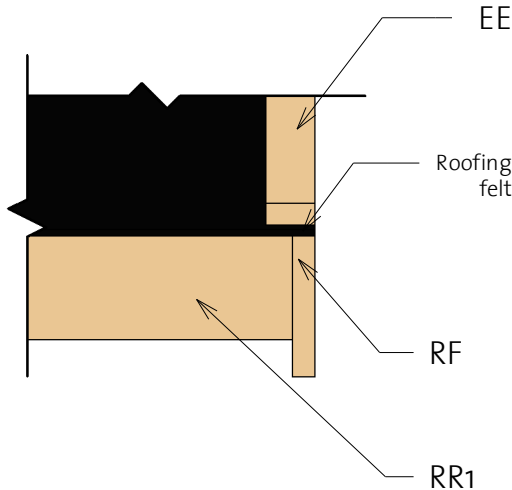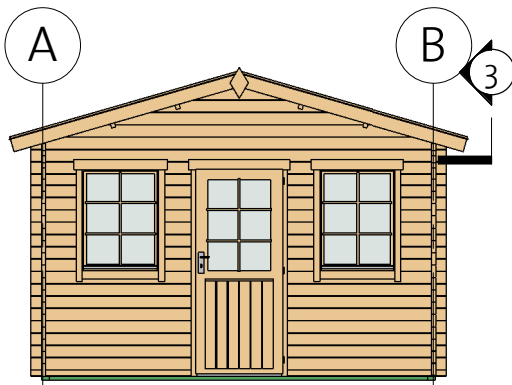


Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	86 5/8"
RF	Roof Fascia 18x120		4	86 5/8"
RR1	Roof reinforcement 18x95		2	159 7/8"
RR2	Roof reinforcement 38x38		2	159 7/8"

Scarborough 40 (144"x104")

Extras

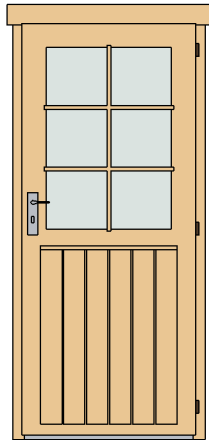

Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	33 1/8"	77"	1
DCB6	Door Crossbar 6	--	--	0"

Type	Count	Length
------	-------	--------

Windboard 18x40	4	86 5/8"
-----------------	---	---------

Type	Count
------	-------



Romb	2
------	---



Fasteners/Extras

Hitblock	300-400 mm		
Bolts	M8x70		12
Screws	5,0 x 70		15
Nails	1,4 x 40		30
Screws	6,0 x 140		45
Screws	4,0 x 40		650

Window Schedule				
Mark	Type	Width	Height	Count
CDW1	Classic double window 1	60 1/4"	39"	2
CW1L	Classic window 1 left	30 1/8"	39"	1
CW1R	Classic window 1 right	30 1/8"	39"	1
WCB6	Windows Crossbar 6	--	--	6

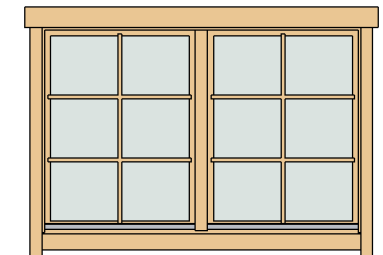

Scarborough 40 (144"x104")

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB1	IFB 70x40		6	138 1/8"
IFB2	IFB 70x40		2	103 5/8"

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x143		1	159 7/8"
RFB	Beam 40x143		4	159 7/8"
RB	17x114		74	85"

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		33	100 5/8"
----	-----------	---	----	----------

BB1	BB 20x40		2	141 3/4"
BB2	BB 20x40		2	102 3/8"

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	86 5/8"
RF	Roof Fascia 18x120		4	86 5/8"
RR1	Roof reinforce ment 18x95		2	159 7/8"
RR2	Roof reinforce ment 38x38		2	159 7/8"

Scarborough 40 (144"x104")

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	59 1/4"
1LG-1	40x114	18	11 3/8"
1LG-2	40x114	18	17 1/2"
1LG-3 *	40x114	1	31 3/8"
1LG-4	40x114	16	59 1/4"
1LG-5 *	40x114	1	62 5/8"
1LG-6 *	40x114	1	93"
1LG-7 *	40x114	1	125 1/4"
1LG-8	40x114	2	151 7/8"
1LG-9 *	40x114	1	151 7/8"

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	151 7/8"
2LG-1 *	40x114	1	31 3/8"
2LG-2 *	40x114	1	62 5/8"
2LG-3 *	40x114	1	93"
2LG-4 *	40x114	1	125 1/4"
2LG-5	40x114	19	151 7/8"
2LG-6 *	40x114	1	151 7/8"

* Gable - delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	25 5/8"
ALG-2	40x114	1	141 1/4"
ALG-3	40x114	8	111 7/8"
ALG-4	40x114	1	126 5/8"
ATL-1	40x114	1	159 7/8"


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	25 5/8"
BLG-2	40x114	1	141 1/4"
BLG-3	40x114	8	111 7/8"
BLG-4	40x114	1	126 5/8"
BTL-1	40x114	1	159 7/8"

Log profiles	
Profile	Profile

40x57	
40x114	

Log profiles	
Profile	Profile

40x114	
--------	--