
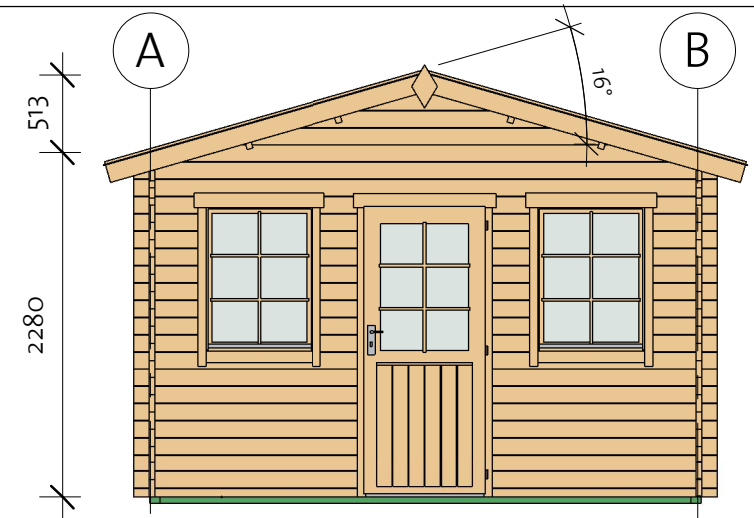


Scarborough 40 (366x264)

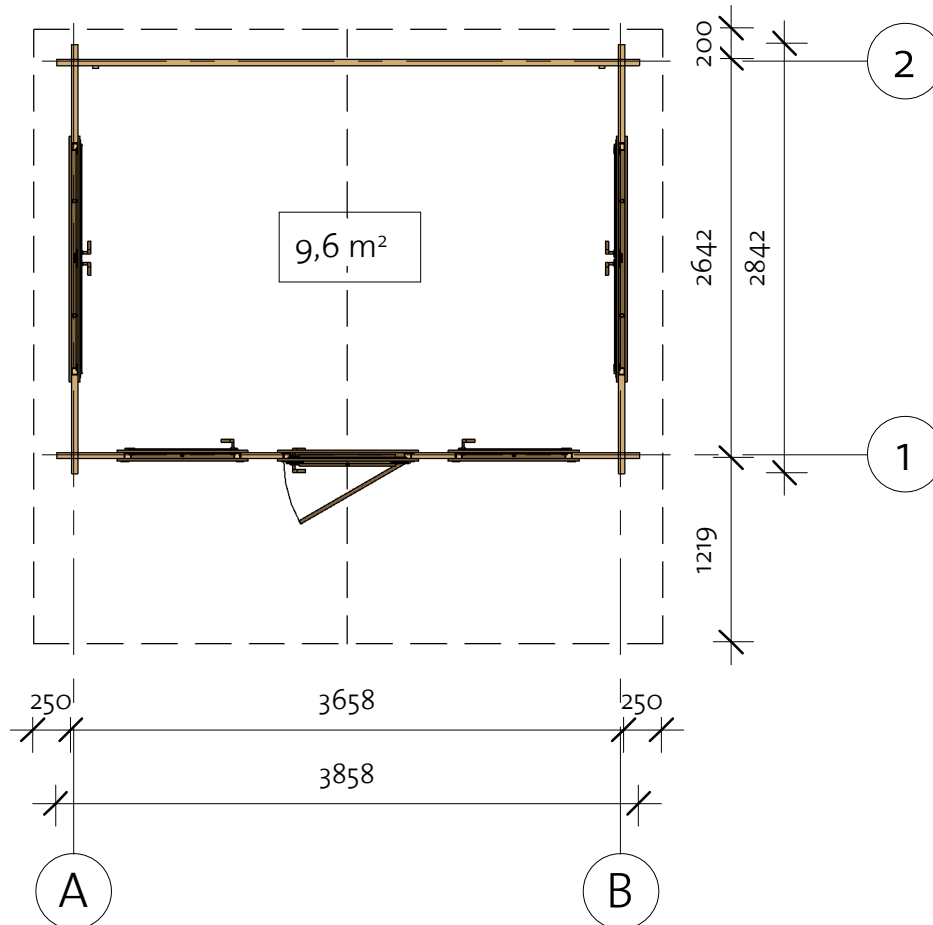


Scarborough 40 (366x264)

Foundation


Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB1	IFB 70x40		6	3508
IFB2	IFB 70x40		2	2632

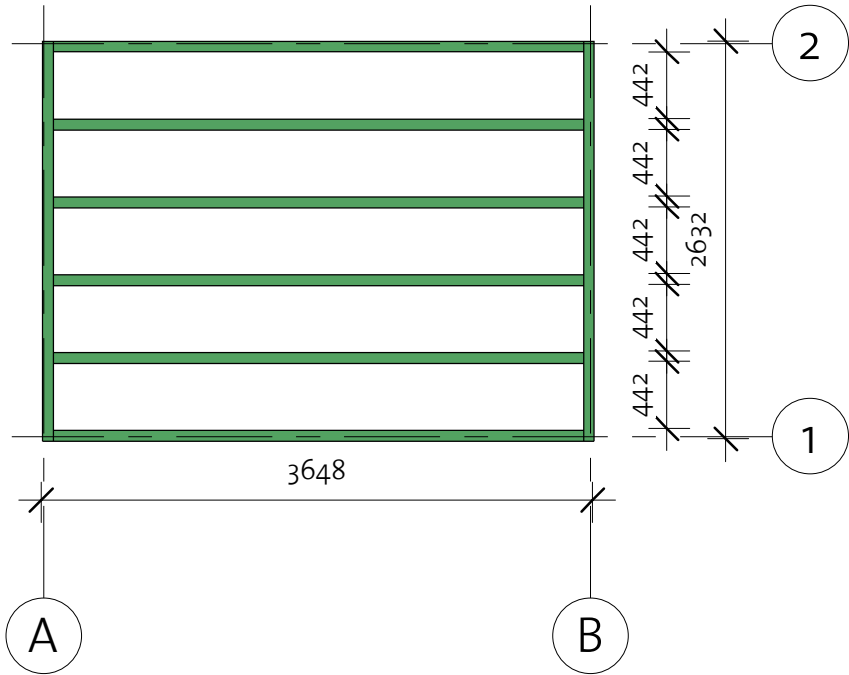


Floor Plan

Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		33	2556
BB1	BB 20x40		2	3600
BB2	BB 20x40		2	2600

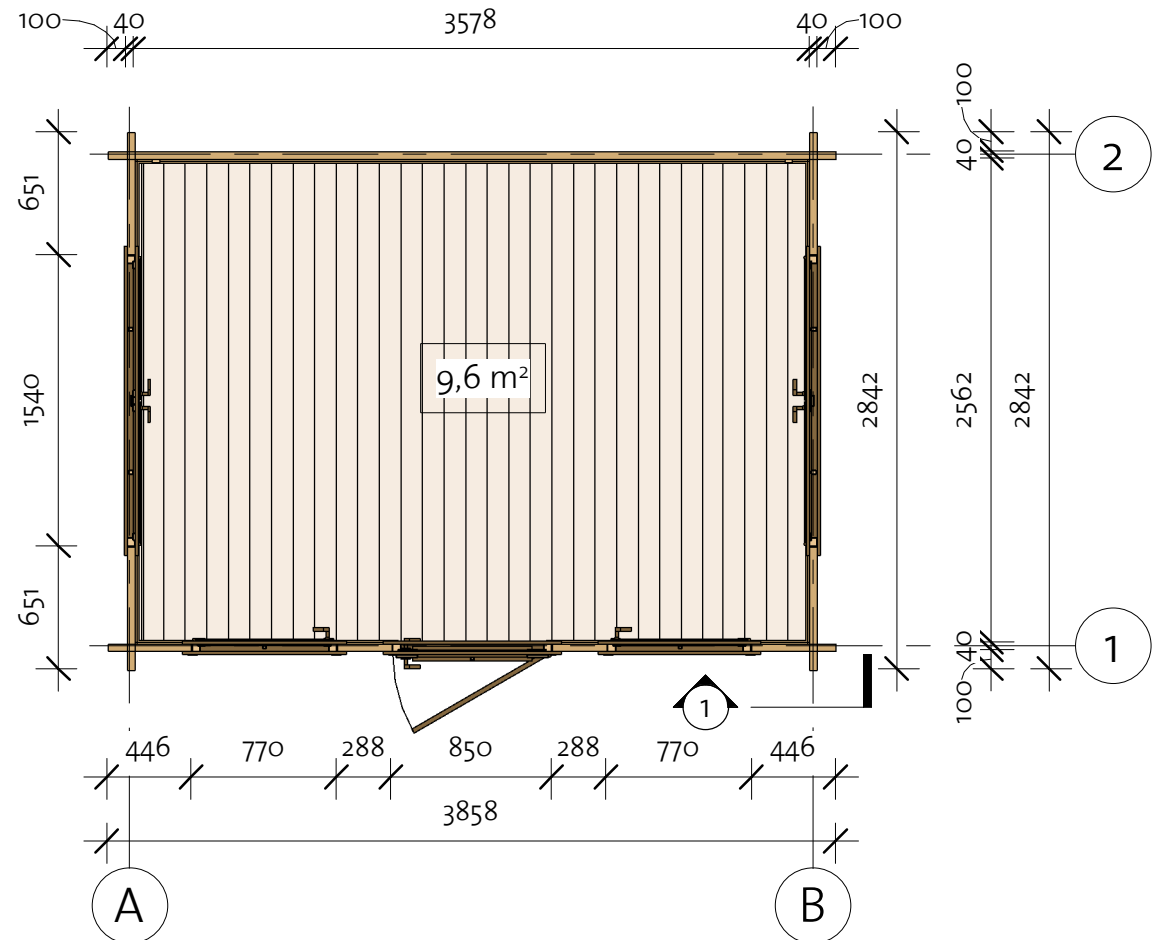

Wall 1

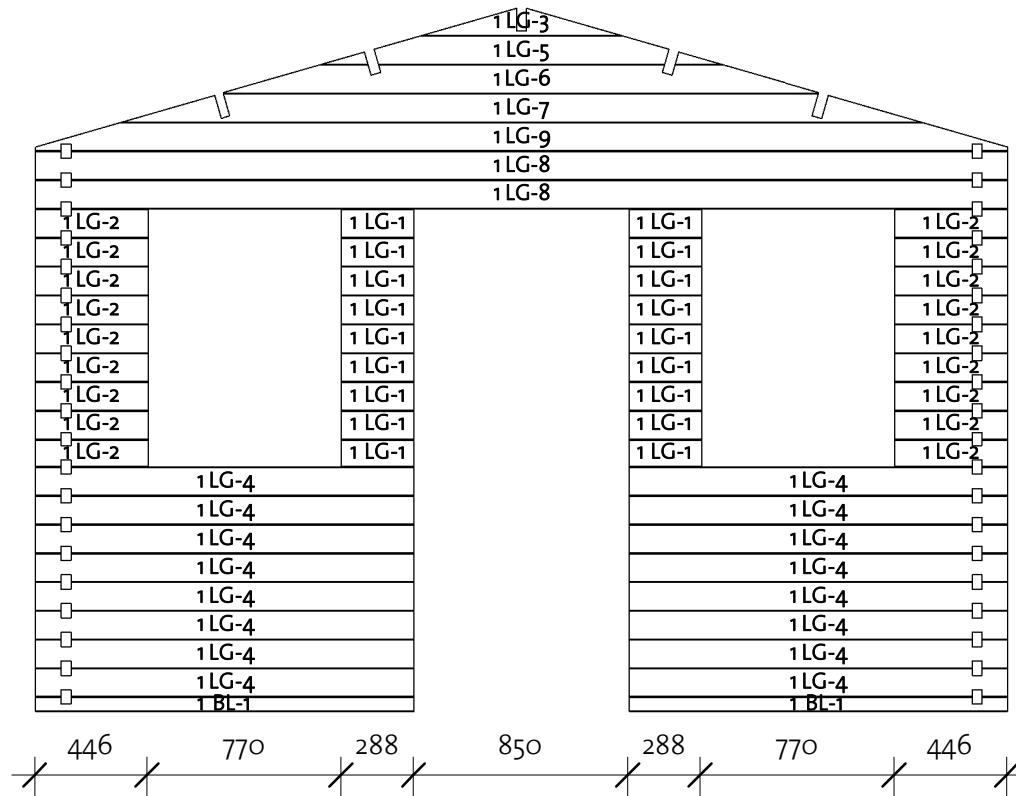



1BL-1	40x57	2	1504
1LG-1	40x114	18	288
1LG-2	40x114	18	446
1LG-3 [*]	40x114	1	798
1LG-4	40x114	16	1504
1LG-5 [*]	40x114	1	1592
1LG-6 [*]	40x114	1	2362
1LG-7 [*]	40x114	1	3181
1LG-8	40x114	2	3858
1LG-9 [*]	40x114	1	3858

Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

Scarborough 40 (366x264)

Wall 2

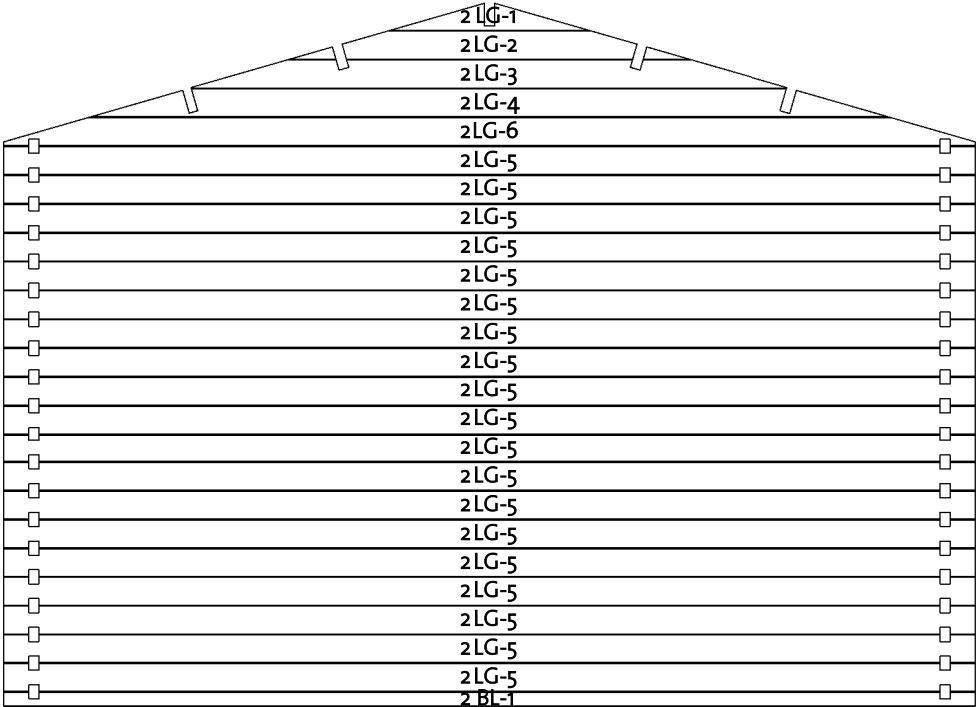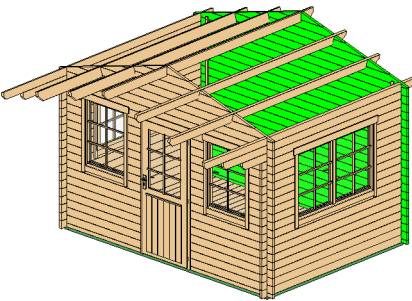

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	3858
2LG-1 *	40x114	1	798
2LG-2 *	40x114	1	1592
2LG-3 *	40x114	1	2362
2LG-4 *	40x114	1	3181
2LG-5	40x114	19	3858
2LG-6 *	40x114	1	3858


* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	


Scarborough 40 (366x264)

Wall A

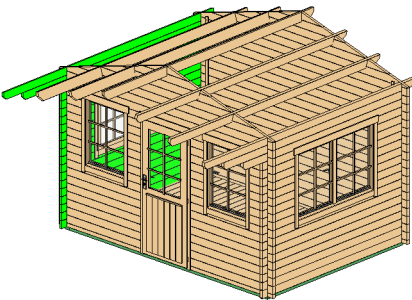

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	18	651
ALG-2	40X114	1	3588
ALG-3	40X114	8	2842
ALG-4	40X114	1	3215
ATL-1	40X114	1	4061

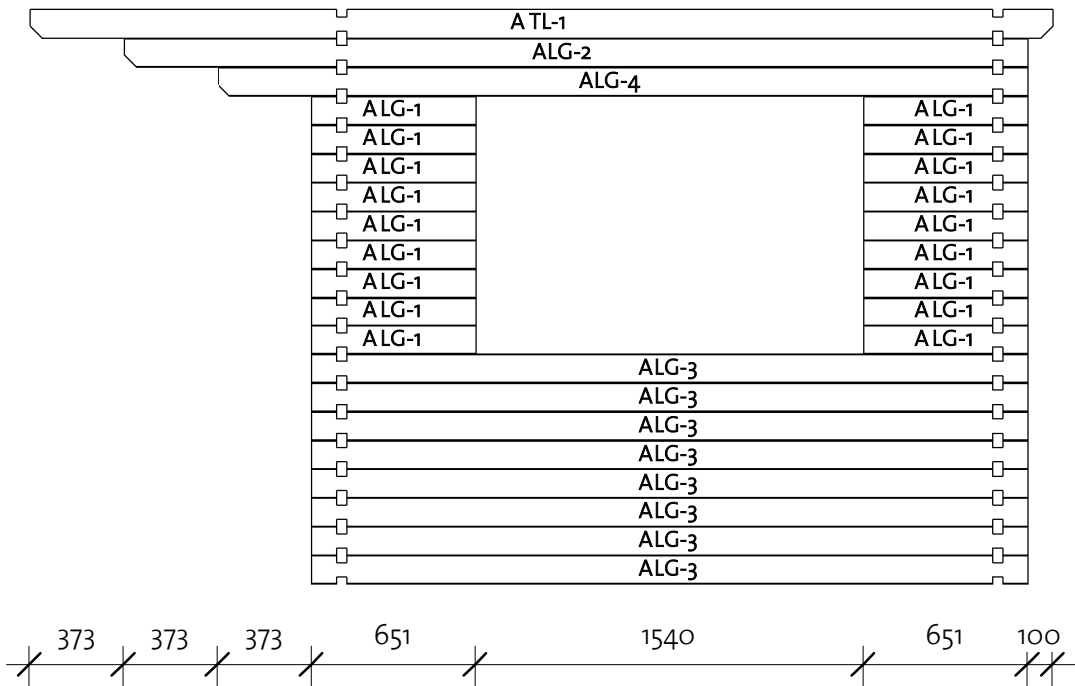


Log Profile Wall A	
Profile	Profile

40X114	
40X114	


Scarborough 40 (366x264)

Wall B

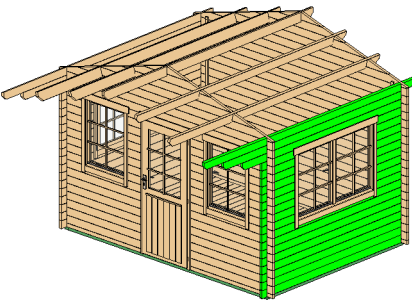

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	18	651
BLG-2	40X114	1	3588
BLG-3	40X114	8	2842
BLG-4	40X114	1	3215
BTL-1	40X114	1	4061

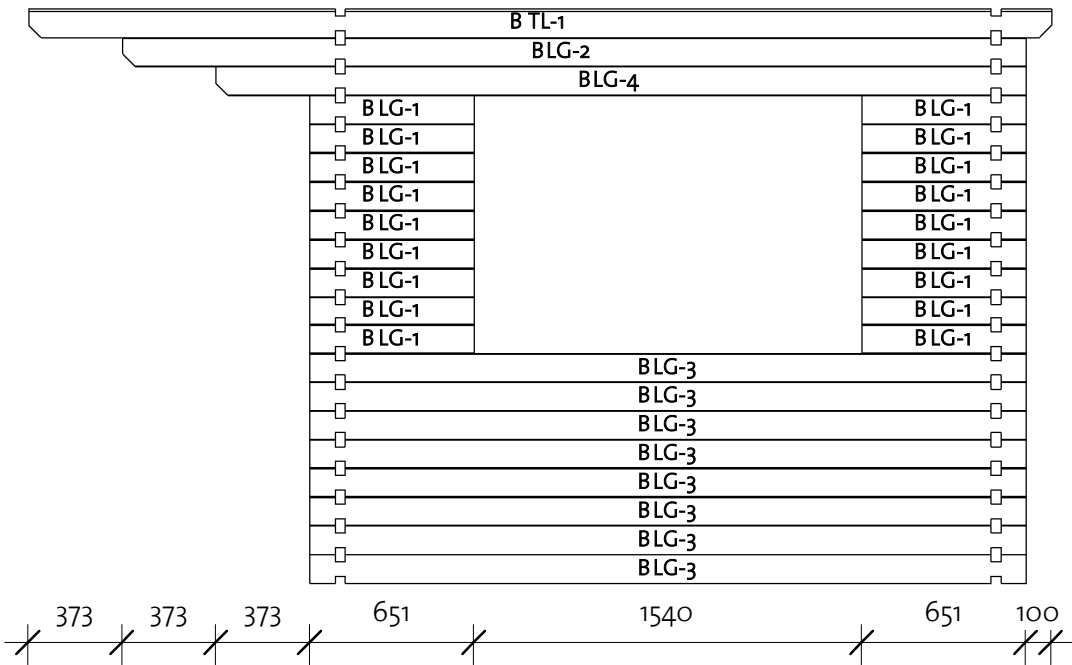


Log Profile Wall B	
Profile	Profile

40X114	
40X114	

Scarborough 40 (366x264)


Roof 1

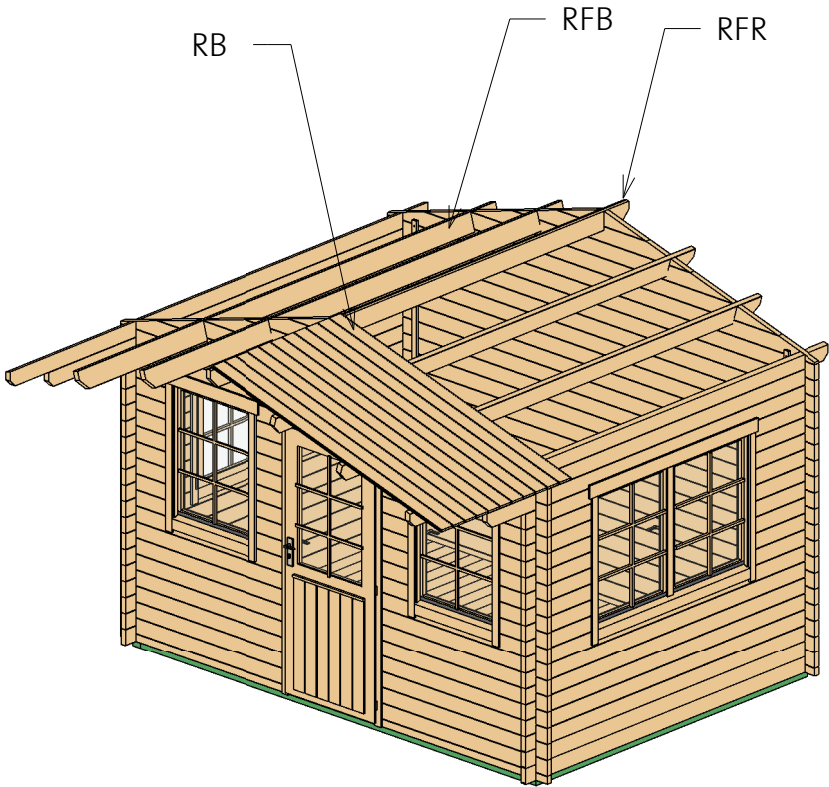


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	4061
RFB	Beam 40x143		4	4061
RB	17x114		74	2158

Scarborough 40 (366x264)



Roof 2

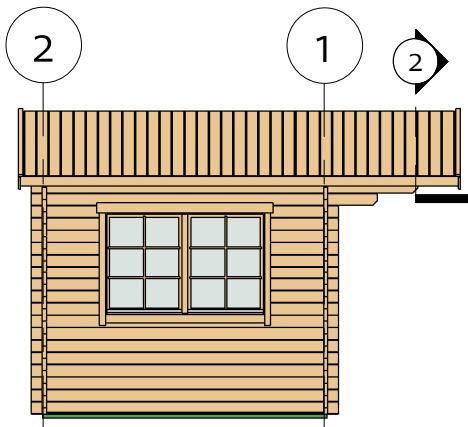

2) Facia

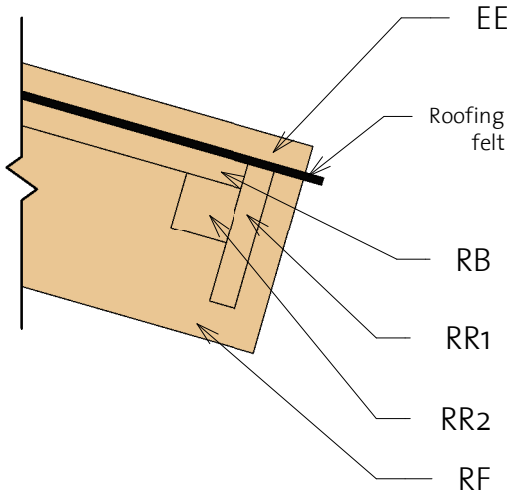

3) Roof Reinforcement

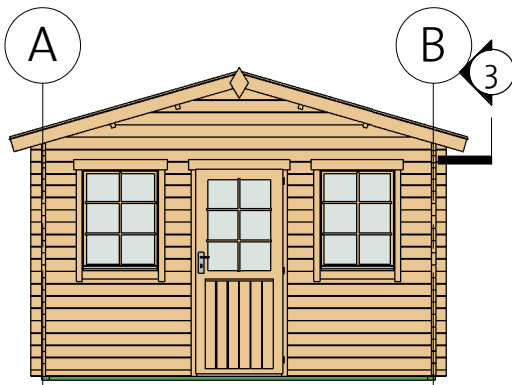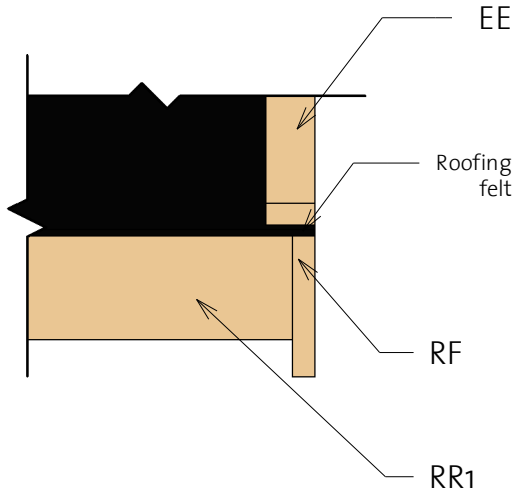


Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	2201
RF	Roof Fascia 18x120		4	2201
RR1	Roof reinforcement 18x95		2	4061
RR2	Roof reinforcement 38x38		2	4061

Scarborough 40 (366x264)

Extras

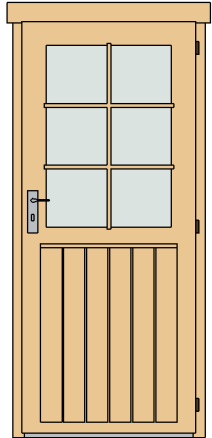

Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1

Type	Count	Length
------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------

Type	Count
------	-------



Romb	2
------	---



Fasteners/Extras

Hitblock	300-400 mm		
Bolts	M8x70		12
Screws	5,0 x 70		15
Nails	1,4 x 40		30
Screws	6,0 x 140		45
Screws	4,0 x 40		650

Window Schedule				
Mark	Type	Width	Height	Count
CDW1	Classic double window 1	1530	990	2
CW1L	Classic window 1 left	765	990	1
CW1R	Classic window 1 right	765	990	1
WCB6	Windows Crossbar 6	--	--	6

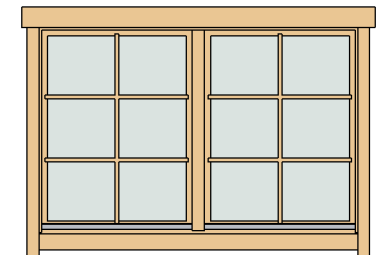

Scarborough 40 (366x264)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB1	IFB 70x40		6	3508
IFB2	IFB 70x40		2	2632

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x143		1	4061
RFB	Beam 40x143		4	4061
RB	17x114		74	2158

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		33	2556
----	-----------	---	----	------

BB1	BB 20x40		2	3600
BB2	BB 20x40		2	2600

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	2201
RF	Roof Fascia 18x120		4	2201
RR1	Roof reinforce ment 18x95		2	4061
RR2	Roof reinforce ment 38x38		2	4061

Scarborough 40 (366x264)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	1504
1LG-1	40x114	18	288
1LG-2	40x114	18	446
1LG-3 *	40x114	1	798
1LG-4	40x114	16	1504
1LG-5 *	40x114	1	1592
1LG-6 *	40x114	1	2362
1LG-7 *	40x114	1	3181
1LG-8	40x114	2	3858
1LG-9 *	40x114	1	3858

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	651
ALG-2	40x114	1	3588
ALG-3	40x114	8	2842
ALG-4	40x114	1	3215
ATL-1	40x114	1	4061

Log profiles	
Profile	Profile

40x57	
40x114	

Wall 2			
Mark	Profile	Count	Cut Length


2BL-1	40x57	1	3858
2LG-1 *	40x114	1	798
2LG-2 *	40x114	1	1592
2LG-3 *	40x114	1	2362
2LG-4 *	40x114	1	3181
2LG-5	40x114	19	3858
2LG-6 *	40x114	1	3858

* Gable - delivered premounted

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	651
BLG-2	40x114	1	3588
BLG-3	40x114	8	2842
BLG-4	40x114	1	3215
BTL-1	40x114	1	4061

Log profiles	
Profile	Profile

40x114	
--------	--