
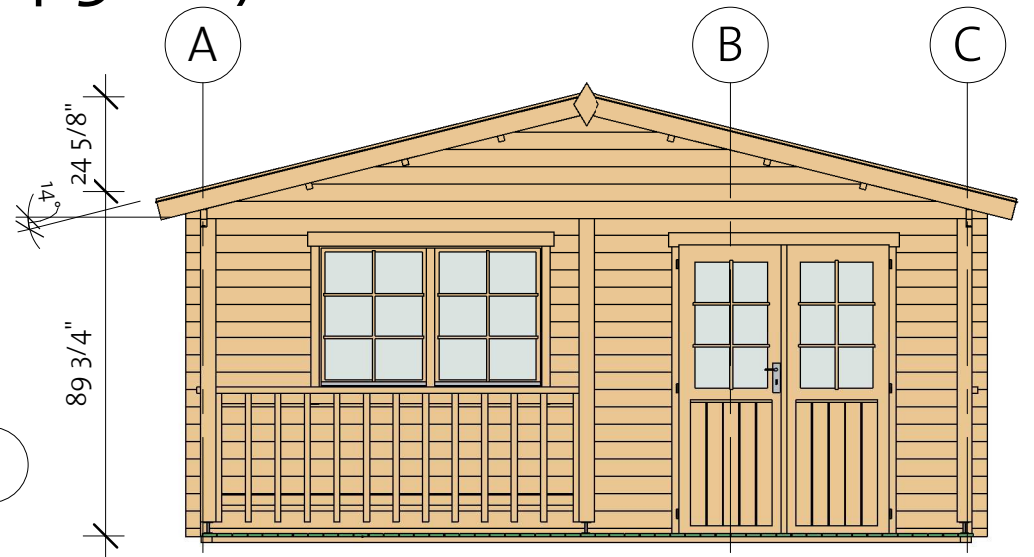


# Louisville 40 (200 3/4" x 224 3/8")

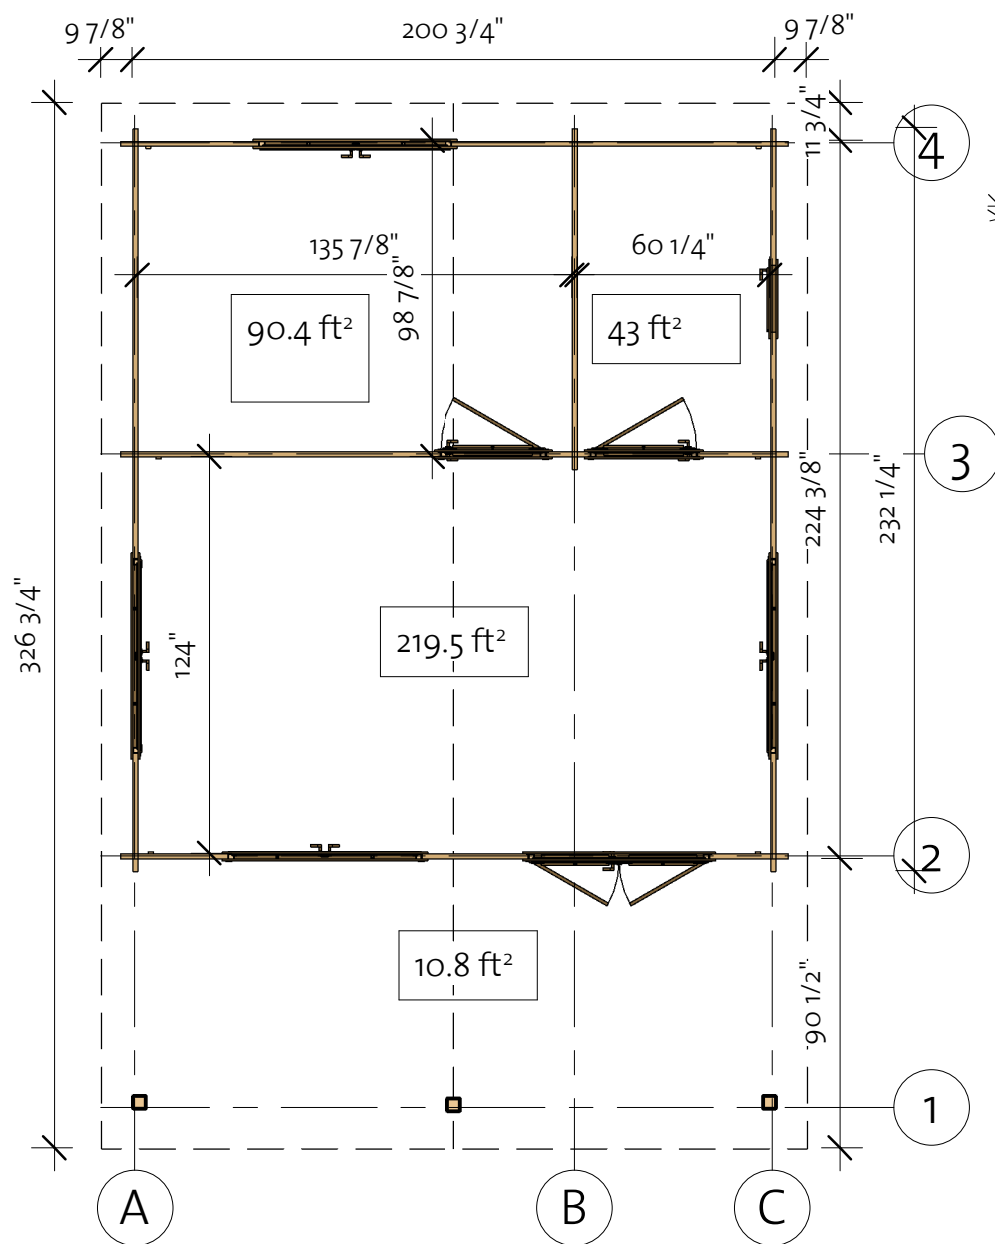


92402221\_240229


**EZ** Log Structures  
Do-It-Yourself Building Kits

# Louisville 40 (200 3/8" x 224 3/8")

Foundation

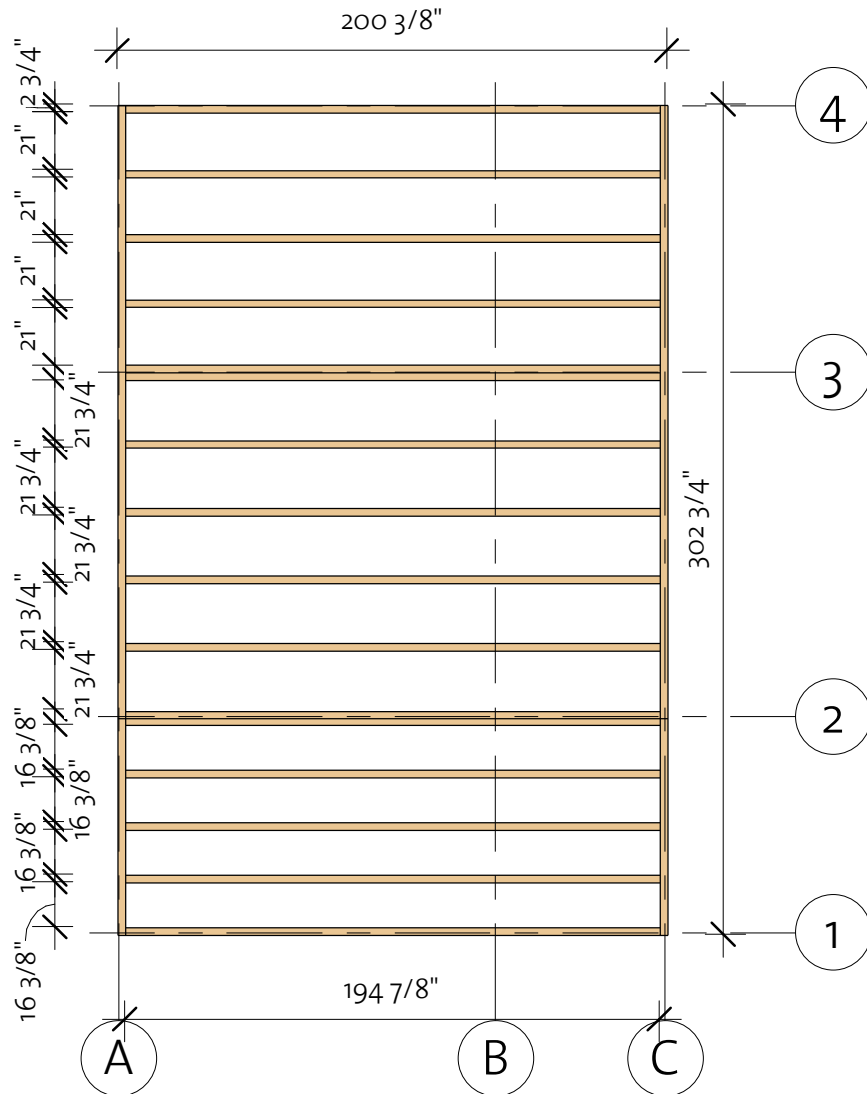



Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB1	IFB 70x40		16	194 7/8"
IFB2	IFB 70x40		2	79 3/8"
IFB3	IFB 70x40		2	223 3/8"


# Louisville 40 (200 3/4" x 224 3/8")

Floor Plan



Floor Schedule

Mark	Type	Profile	Count	Length
FB2	FB 17x114		45	95 1/2"
FB1	FB 17x114		45	123 3/4"
BB 1	BB 18x40		2	224 3/8"
BB 2	BB 18x40		5	200 3/4"

Terrace Schedule


Mark	Type	Profile	Count	Length
TB	TB 21x95		51	78 1/2"

① Baseboard

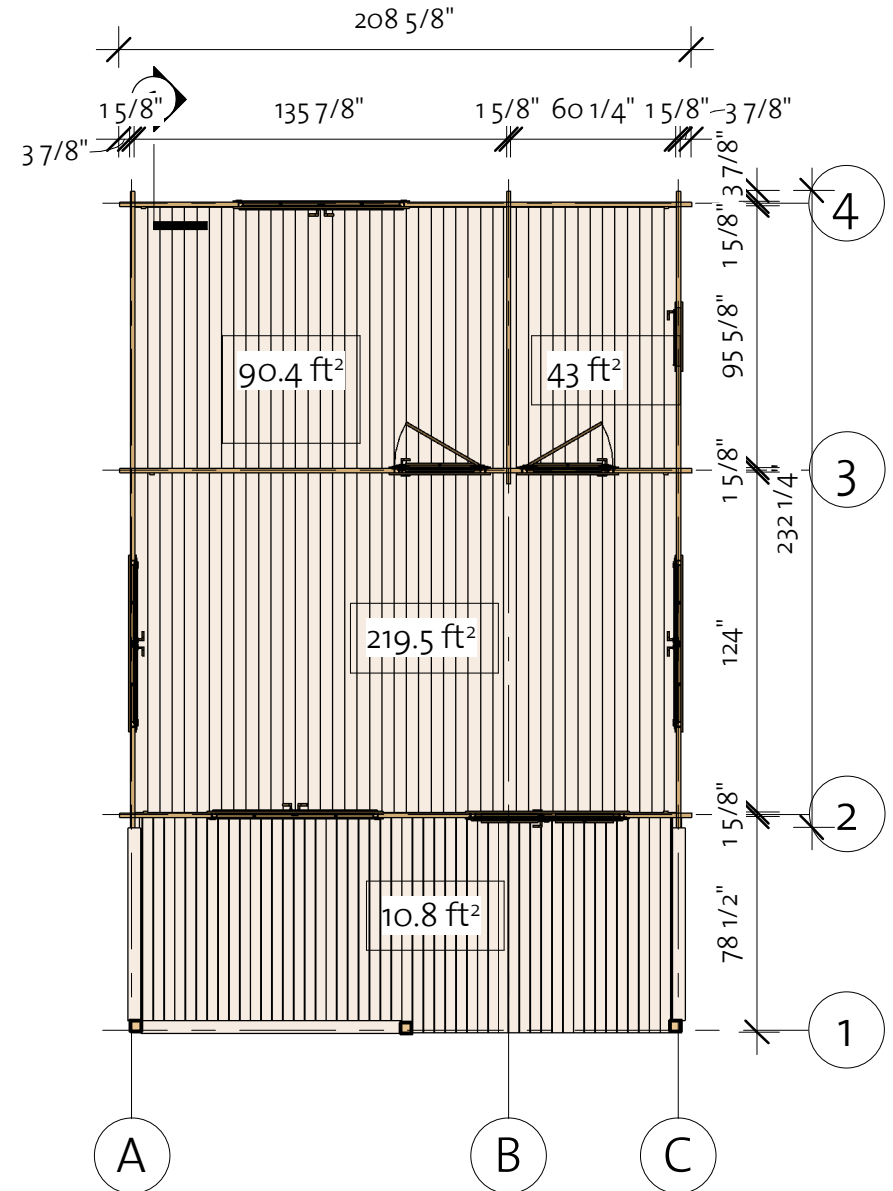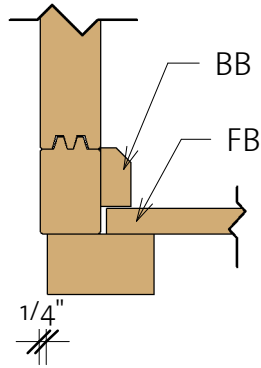

# Louisville 40 (200 3/4"x224 3/8")


Wall 1

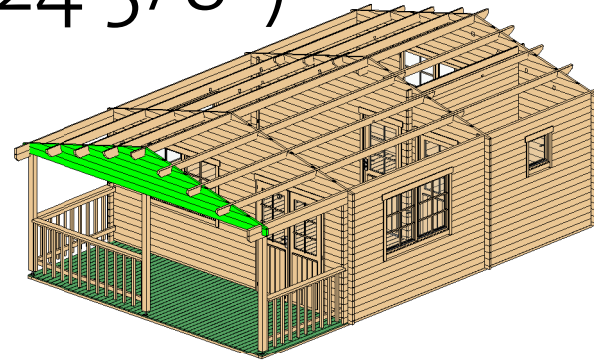

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	35 3/8"
1LG-2 *	40X114	1	71 3/8"
1LG-3 *	40X114	1	107 1/2"
1LG-4 *	40X114	1	143 1/2"
1LG-5 *	40X114	1	179 5/8"
1LG-6 *	40X114	1	208 5/8"
1LG-7	40X114	1	208 5/8"


\* Gable - delivered premounted

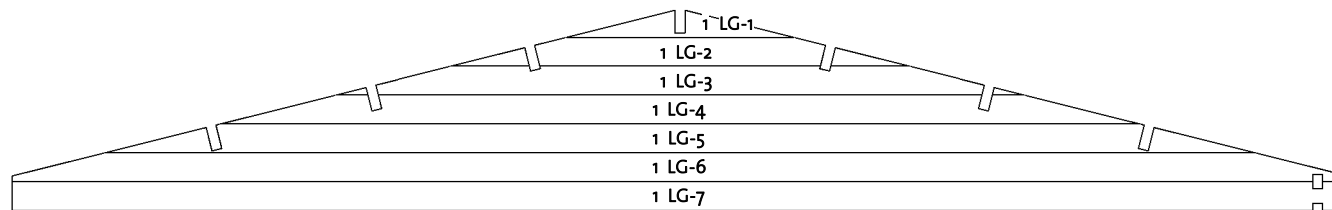

Log Profile Wall 1


Profile	Profile
---------	---------

40X114




# Louisville 40 (200 3/4" x 224 3/8")

Wall 2

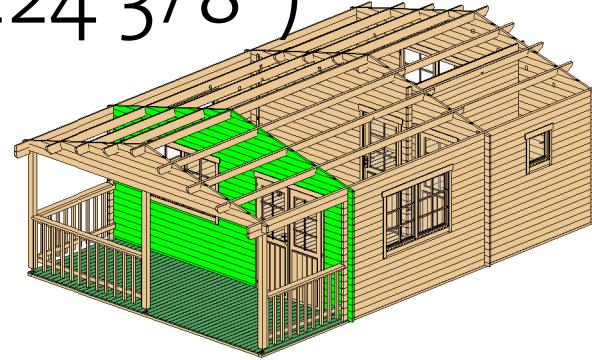

\* Gable - delivered premounted


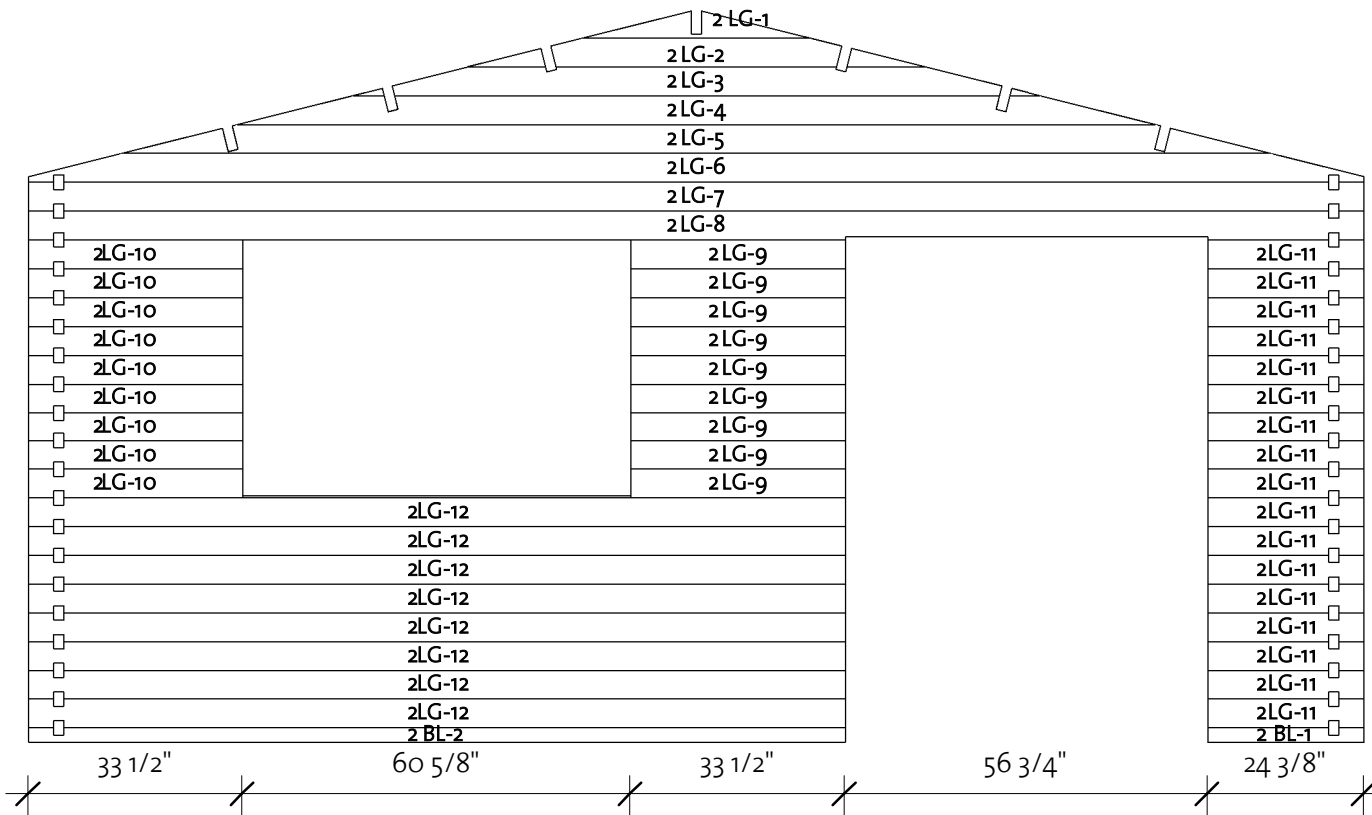


92402221\_240229

## Wall 2



Mark	Profile	Count	Cut Length
2BL-1	40x57	1	24 3/8"
2BL-2	40x57	1	127 1/2"
2LG-1 *	40x114	1	35 3/8"
2LG-2 *	40x114	1	71 3/8"
2LG-3 *	40x114	1	107 1/2"
2LG-4 *	40x114	1	143 1/2"
2LG-5 *	40x114	1	179 5/8"
2LG-6 *	40x114	1	208 5/8"
2LG-7	40x114	1	208 5/8"
2LG-8	40x114	1	208 5/8"
2LG-9	40x114	9	33 1/2"
2LG-10	40x114	9	33 1/2"
2LG-11	40x114	17	24 3/8"
2LG-12	40x114	8	127 1/2"

## Log Profile Wall 2

Profile	Profile
40x57	
40x114	

# Louisville 40 (200 3/4" x 224 3/8")

Wall 3

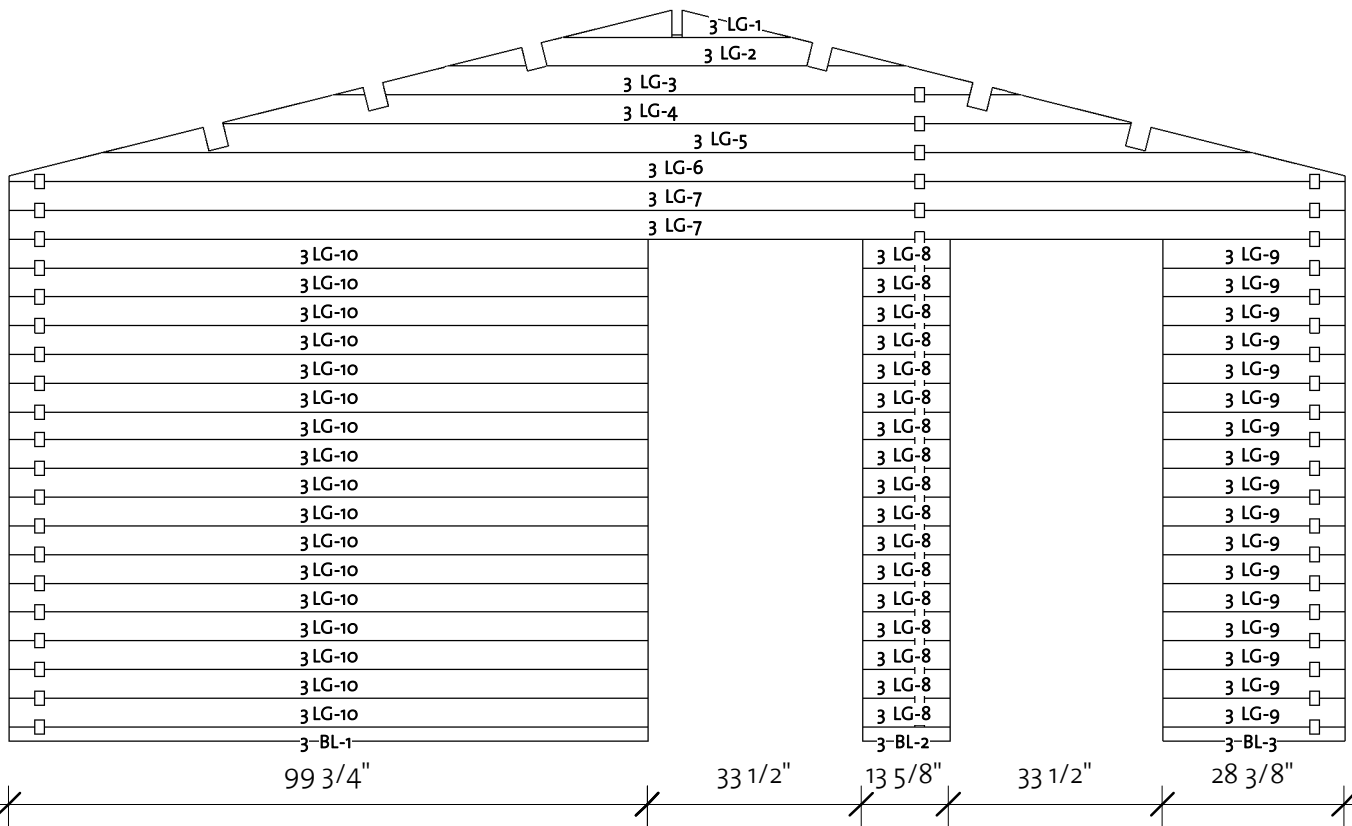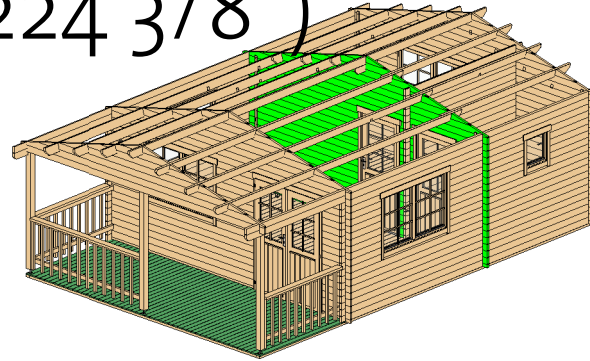

92402221\_240229

## Wall 3



Mark	Profile	Count	Cut Length
------	---------	-------	------------

3BL-1	40X57	1	99 3/4"
3BL-2	40X57	1	13 5/8"
3BL-3	40X57	1	28 3/8"
3LG-1*	40X114	1	35 3/8"
3LG-2*	40X114	1	71 3/8"
3LG-3*	40X114	1	107 1/2"
3LG-4*	40X114	1	142"
3LG-5*	40X114	1	179 5/8"
3LG-6*	40X114	1	208 5/8"
3LG-7	40X114	2	208 5/8"
3LG-8	40X114	17	13 5/8"
3LG-9	40X114	17	28 3/8"
3LG-10	40X114	17	99 3/4"

\* Gable - delivered premounted


## Log Profile Wall 3

Profile	Profile
---------	---------

40X57	
40X114	

# Louisville 40 (200 3/4" x 224 3/8")


Wall 4

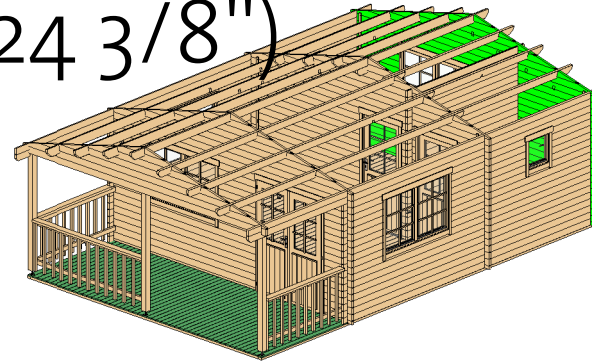

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	208 5/8"
4LG-1*	40X114	1	35 3/8"
4LG-2*	40X114	1	71 3/8"
4LG-3*	40X114	1	107 1/2"
4LG-4*	40X114	1	142"
4LG-5*	40X114	1	179 5/8"
4LG-6*	40X114	1	208 5/8"
4LG-7	40X114	10	208 5/8"
4LG-8	40X114	9	43 1/8"
4LG-9	40X114	9	104 7/8"

\* Gable - delivered premounted

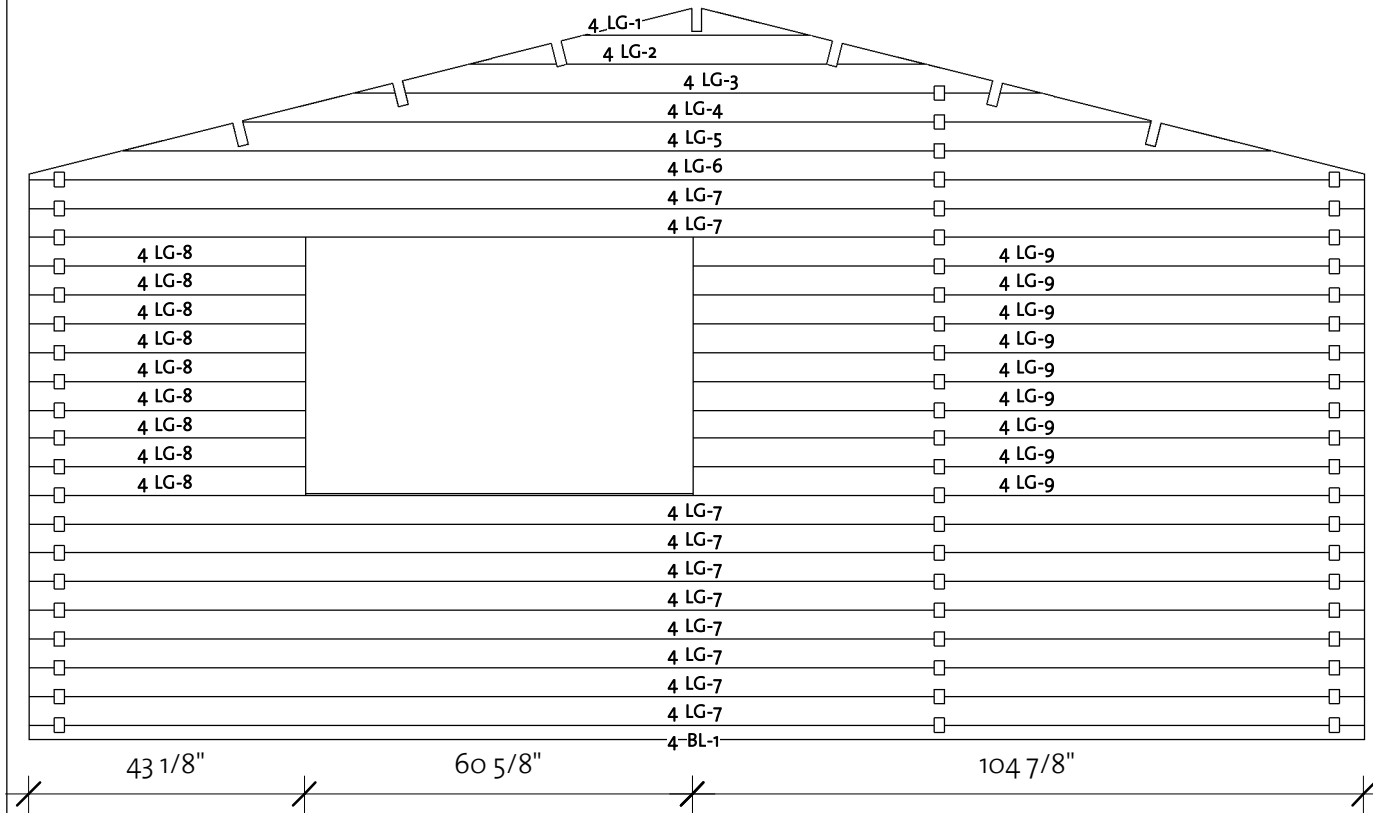


Log Profile Wall 4	
Profile	Profile

40X57	
40X114	



# Louisville 40 (200 3/4"x224 3/8")

Wall A

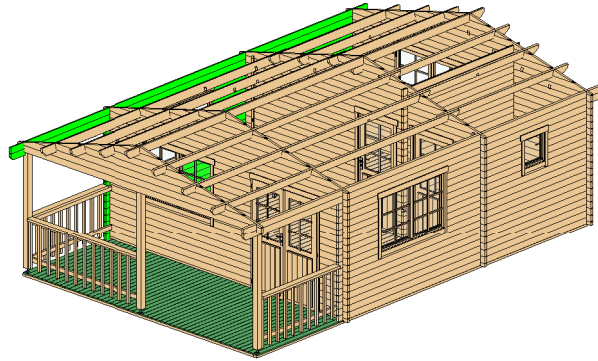



Log Profile Wall A	
Profile	Profile

Log Profile Wall A	
Profile	Profile



Wall A			
Mark	Profile	Count	Cut Length


ALG-1	40x114	1	109 7/8"
ALG-2	40x114	1	216 7/8"
ALG-3	40x114	9	37 1/4"
ALG-4	40x114	9	134 1/2"
ALG-5	40x114	8	232 1/4"
ALG-6	40x114	1	232 1/4"
ATL-1	40x114	1	109 7/8"
ATL-2	40x114	1	216 7/8"

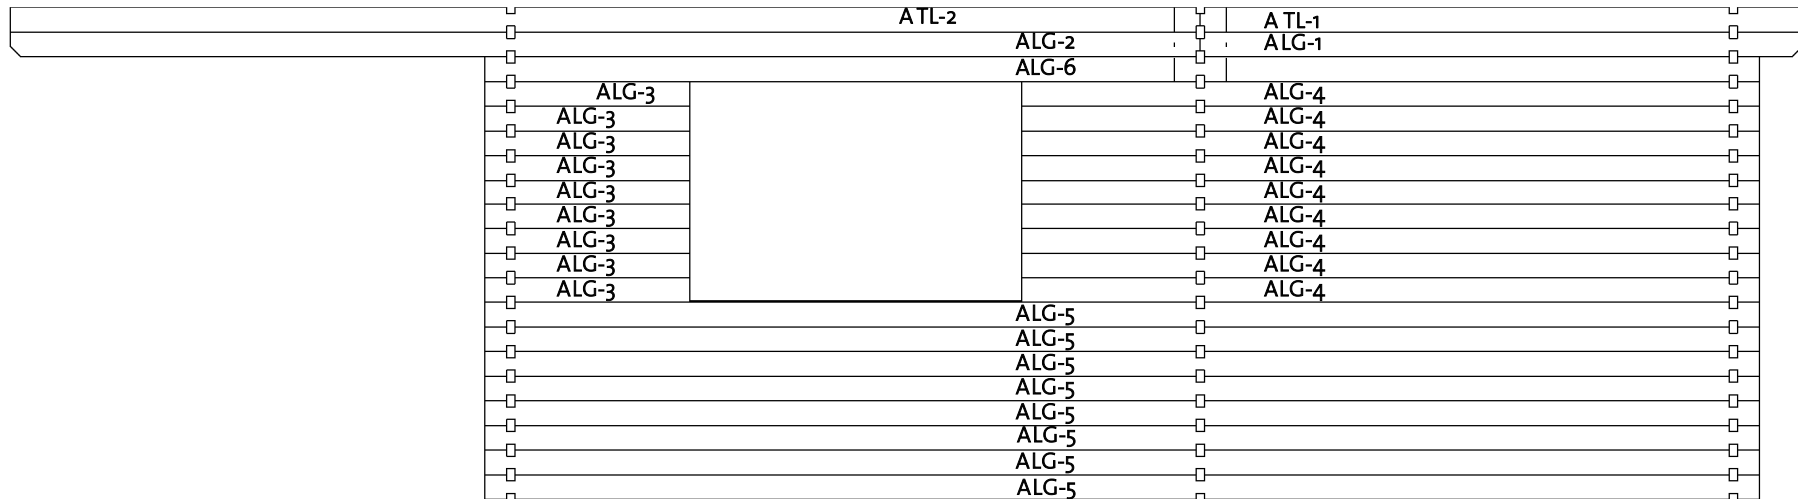



# Louisville 40 (200 3/4" x 224 3/8")

Wall B

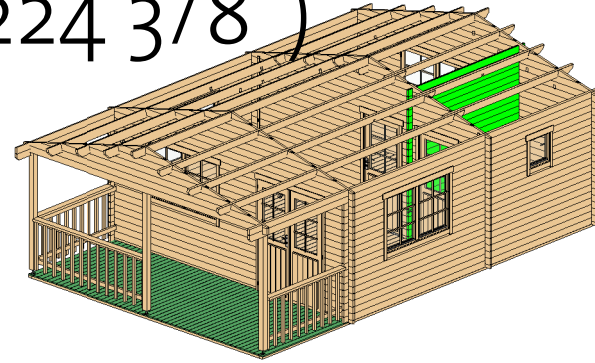

Wall B			
Mark	Profile	Count	Cut Length
BLG-1	4OX114	23	106 3/4"


	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	
	B LG-1	

Log Profile Wall B	
Profile	Profile

4OX114	
--------	--



# Louisville 40 (200 3/4" x 224 3/8")

Wall C

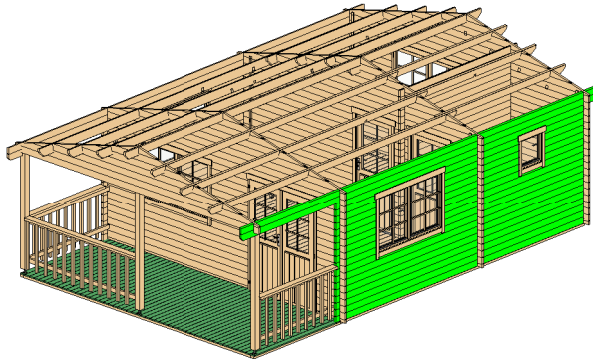


Log Profile Wall C	
Profile	Profile

Log Profile Wall C	
Profile	Profile




Wall C			
Mark	Profile	Count	Cut Length
CLG-1	40X114	1	109 7/8"
CLG-2	40X114	1	216 7/8"
CLG-3	40X114	5	42 5/8"
CLG-4	40X114	9	37 1/4"
CLG-5	40X114	8	232 1/4"
CLG-6	40X114	1	232 1/4"
CLG-7	40X114	5	70 3/8"
CLG-8	40X114	4	134 1/2"
CTL-1	40X114	1	109 7/8"
CTL-2	40X114	1	216 7/8"

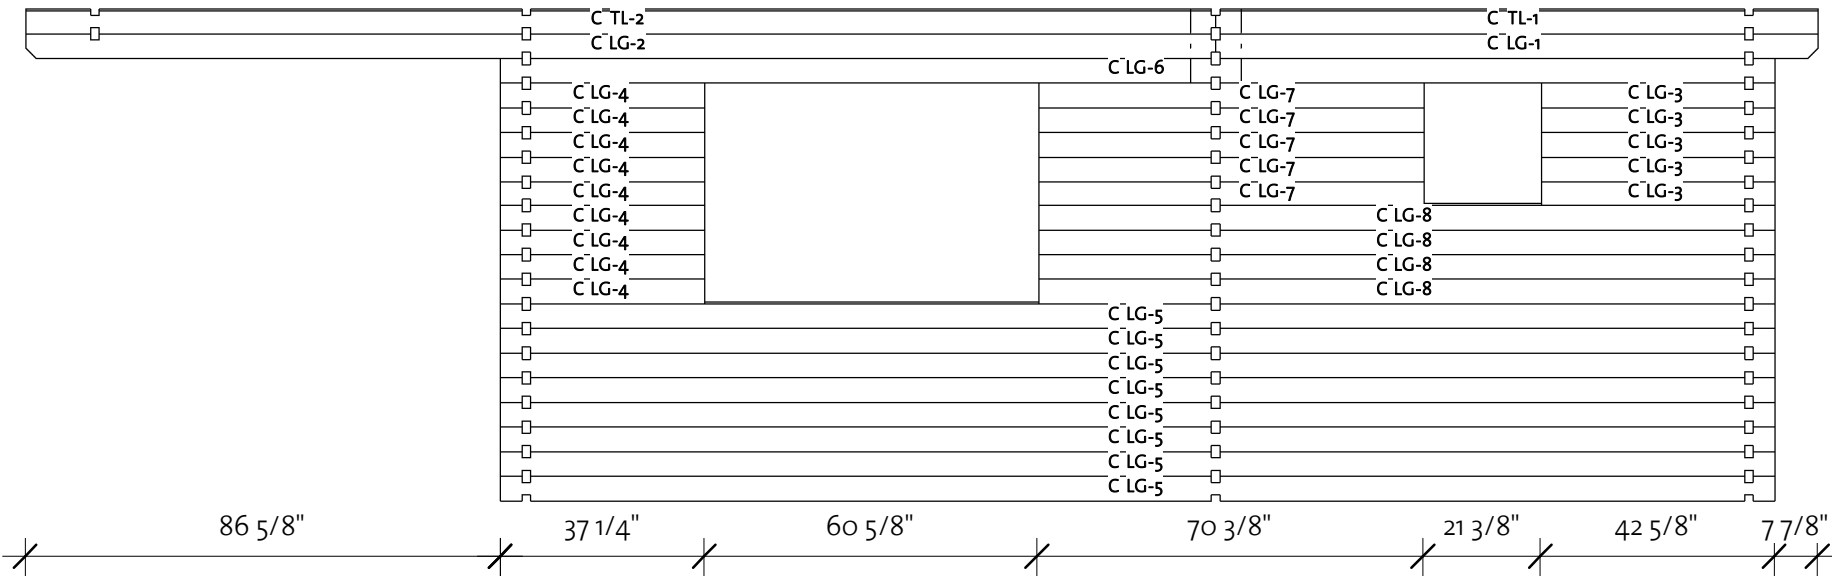

# Louisville 40 (200 3/4" x 224 3/8")




Roof 1

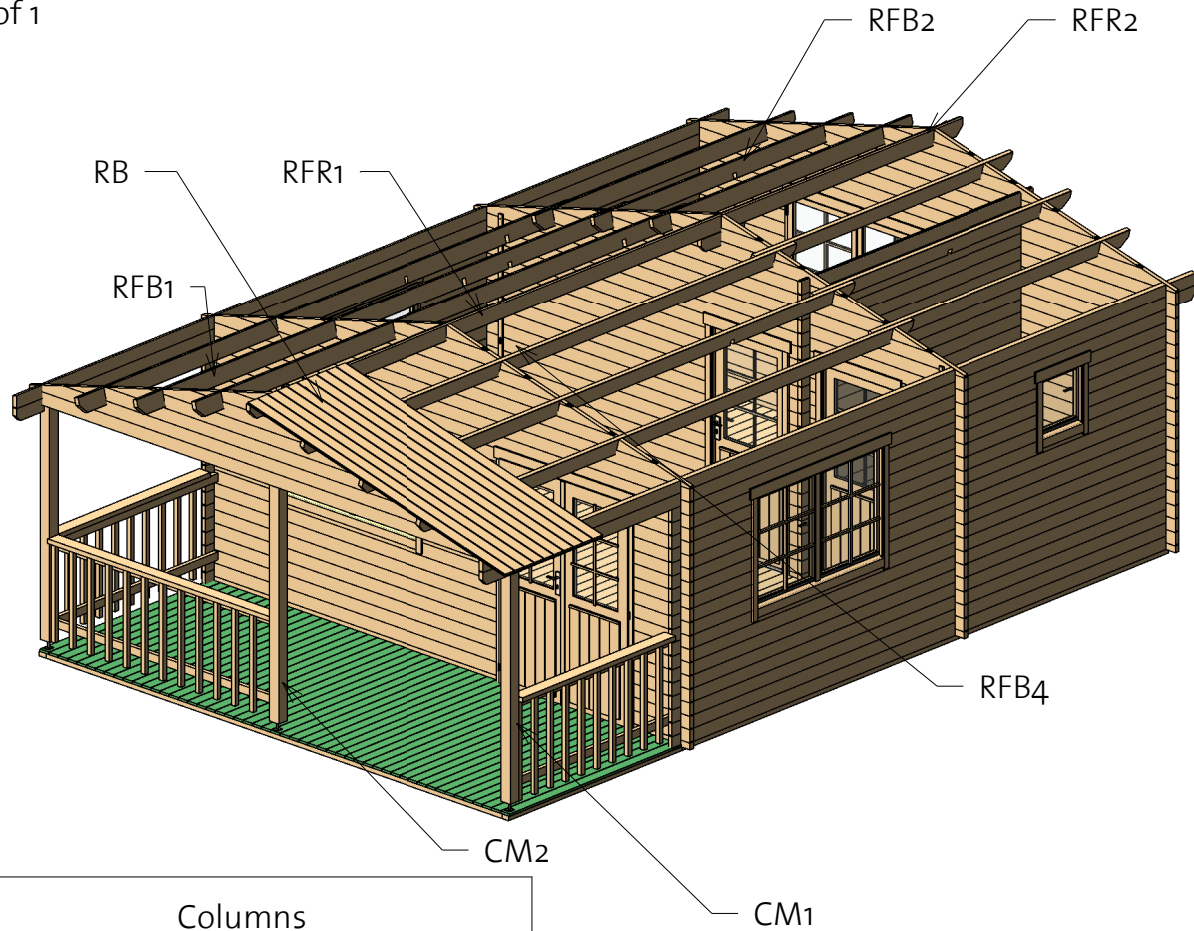

Columns			
Mark	Profile	Count	Length


CM1	Post 100X100	2	79 1/4"
CM2	Post 100X100	1	81 1/2"

Roof				
Mark	Type	Profile	Count	Cut Length



RB	17x114		148	113 1/2"
RFB1	Beam 40X143		6	225 5/8"
RFB2	Beam 40X143		6	118 1/2"
RFB3	Beam 40X120		1	19 5/8"
RFR1	Ridge 40X143		1	216 7/8"
RFR2	Ridge 40X143		1	109 7/8"

# Louisville 40 (200 3/4" x 224 3/8")


Roof 2

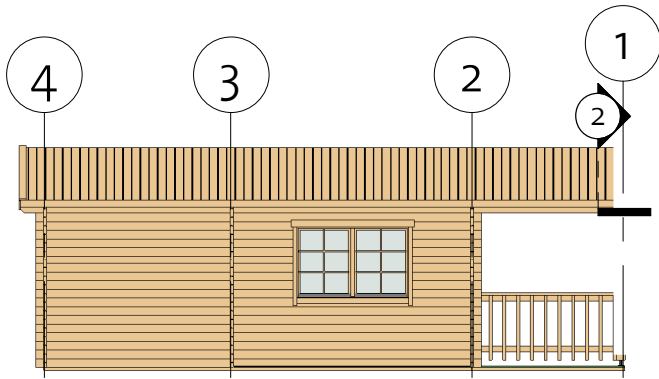

② Fascia

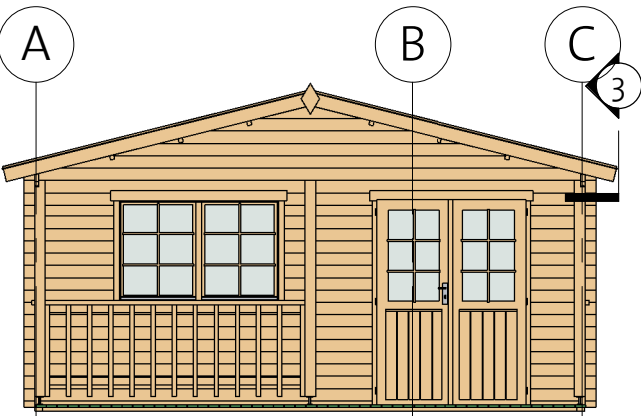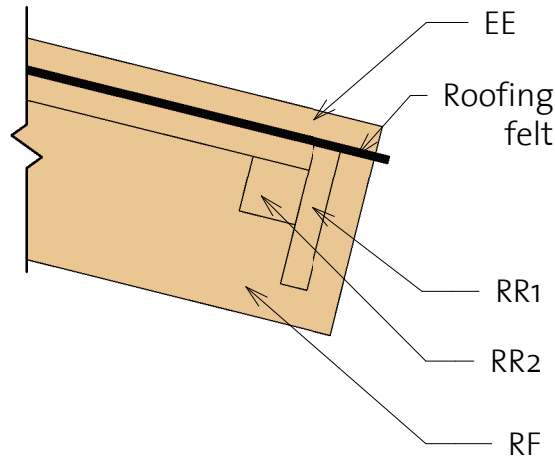

③ Roof Reinforcement

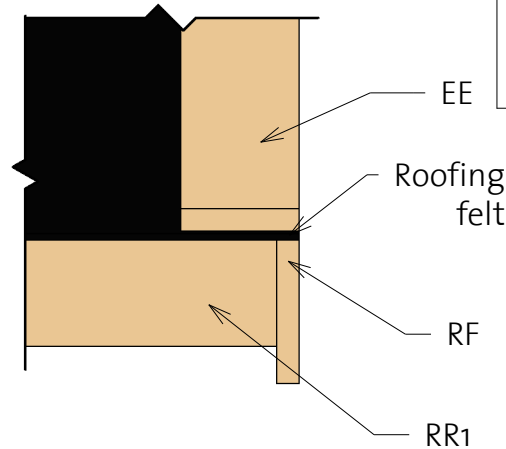

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	115 1/4"
RF	Roof Fascia 18x120		4	115 1/4"
RR1	Roof reinforcement 18x95		4	163 3/8"
RR2	Roof reinforcement 38x38		4	163 3/8"

# Louisville 40 (200 3/4" x 224 3/8")



Extras



Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	56 1/8"	77"	1
CD4R	Classic door 4 right	33 1/8"	77"	1
CD4L	Classic door 4 left	33 1/8"	77"	1
DCB6	Door Crossbar 6	--	--	1/8"
DB	Door beam 1440 mm	40	12	1


Fasteners/Extras		
Name	Type	Count
Hitblock	300-400 mm	
Dowel	16,0 x 150	12
Bolts	M8x70	18
Screws	5,0 x 70	50
Nails	1,4 x 40	60
Screws	6,0 x 140	80
Screws	4,0 x 40	1800


Window Schedule				
Model	Type	Width	Height	Count
CDW1	Classic double window 1	60 1/4"	39"	4
CW12R	Classic window 12, full glass righth	21 1/4"	21 1/4"	1
WCB6	Windows Crossbar 6	--	--	8

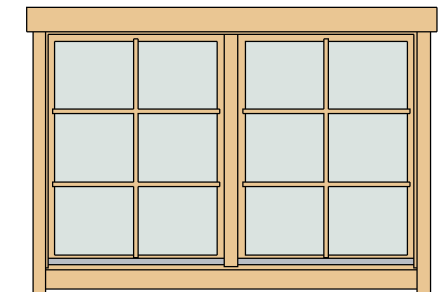



# Louisville 40 (200 3/4"x224 3/8")




## List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		16	194 7/8"
IFB2	IFB 70x40		2	79 3/8"
IFB3	IFB 70x40		2	223 3/8"

Floor Schedule				
Mark	Type	Profile	Count	Length
FB2	FB 17x114		45	95 1/2"
FB1	FB 17x114		45	123 3/4"

BB 1	BB 18x40		2	224 3/8"
BB 2	BB 18x40		5	200 3/4"

Terrace Schedule				
Mark	Type	Profile	Count	Length
TB	TB 21x95		51	78 1/2"


Roof				
Mark	Type	Profile	Count	Cut Length
RB	17x114		148	113 1/2"
RFB1	Beam 40x143		6	225 5/8"
RFB2	Beam 40x143		6	118 1/2"
RFB3	Beam 40x120		1	19 5/8"
RFR1	Ridge 40x143		1	216 7/8"
RFR2	Ridge 40x143		1	109 7/8"

Type	Count	Length
------	-------	--------

Windboard 18x40	6	2200
--------------------	---	------





Type	Count
------	-------

Romb	2
------	---





# Louisville 40 (200 3/4"x224 3/8")

## List of all items 2

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	115 1/4"
RF	Roof Fascia 18x120		4	115 1/4"
RR1	Roof reinforcement 18x95		4	163 3/8"
RR2	Roof reinforcement 38x38		4	163 3/8"

Columns			
Mark	Profile	Count	Length
CM1	Post 100X100	2	79 1/4"
CM2	Post 100X100	1	81 1/2"

Fence schedule				
Mark	Type	Profile	Count	Length
FN1	Fence 40x40		33	33 1/2"
FN2	Fence 40x70		2	94 1/2"
FN3	Fence 40x70		4	74"
FN4	Fence 40x120		1	94 1/2"
FN5	Fence 40x120		2	70 1/8"

# Louisville 40 (200 3/4"x224 3/8")

## List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	35 3/8"
1LG-2 *	40X114	1	71 3/8"
1LG-3 *	40X114	1	107 1/2"
1LG-4 *	40X114	1	143 1/2"
1LG-5 *	40X114	1	179 5/8"
1LG-6 *	40X114	1	208 5/8"
1LG-7	40X114	1	208 5/8"

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	24 3/8"
2BL-2	40X57	1	127 1/2"
2LG-1 *	40X114	1	35 3/8"
2LG-2 *	40X114	1	71 3/8"
2LG-3 *	40X114	1	107 1/2"
2LG-4 *	40X114	1	143 1/2"
2LG-5 *	40X114	1	179 5/8"
2LG-6 *	40X114	1	208 5/8"
2LG-7	40X114	1	208 5/8"
2LG-8	40X114	1	208 5/8"
2LG-9	40X114	9	33 1/2"
2LG-10	40X114	9	33 1/2"
2LG-11	40X114	17	24 3/8"
2LG-12	40X114	8	127 1/2"

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	99 3/4"
3BL-2	40X57	1	13 5/8"
3BL-3	40X57	1	28 3/8"
3LG-1 *	40X114	1	35 3/8"
3LG-2 *	40X114	1	71 3/8"
3LG-3 *	40X114	1	107 1/2"
3LG-4 *	40X114	1	142"
3LG-5 *	40X114	1	179 5/8"
3LG-6 *	40X114	1	208 5/8"
3LG-7	40X114	2	208 5/8"
3LG-8	40X114	17	13 5/8"
3LG-9	40X114	17	28 3/8"
3LG-10	40X114	17	99 3/4"

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	208 5/8"
4LG-1 *	40X114	1	35 3/8"
4LG-2 *	40X114	1	71 3/8"
4LG-3 *	40X114	1	107 1/2"
4LG-4 *	40X114	1	142"
4LG-5 *	40X114	1	179 5/8"
4LG-6 *	40X114	1	208 5/8"
4LG-7	40X114	10	208 5/8"
4LG-8	40X114	9	43 1/8"
4LG-9	40X114	9	104 7/8"

\* Gable - delivered premounted



# Louisville 40 (200 3/4"x224 3/8")

## List of all items 4

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	1	109 7/8"
ALG-2	40X114	1	216 7/8"
ALG-3	40X114	9	37 1/4"
ALG-4	40X114	9	134 1/2"
ALG-5	40X114	8	232 1/4"
ALG-6	40X114	1	232 1/4"
ATL-1	40X114	1	109 7/8"
ATL-2	40X114	1	216 7/8"




Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	23	106 3/4"
-------	--------	----	----------

Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	1	109 7/8"
CLG-2	40X114	1	216 7/8"
CLG-3	40X114	5	42 5/8"
CLG-4	40X114	9	37 1/4"
CLG-5	40X114	8	232 1/4"
CLG-6	40X114	1	232 1/4"
CLG-7	40X114	5	70 3/8"
CLG-8	40X114	4	134 1/2"
CTL-1	40X114	1	109 7/8"
CTL-2	40X114	1	216 7/8"

Log profiles	
Profile	Profile

40X57	
40X114	
40X114	
40X114	